
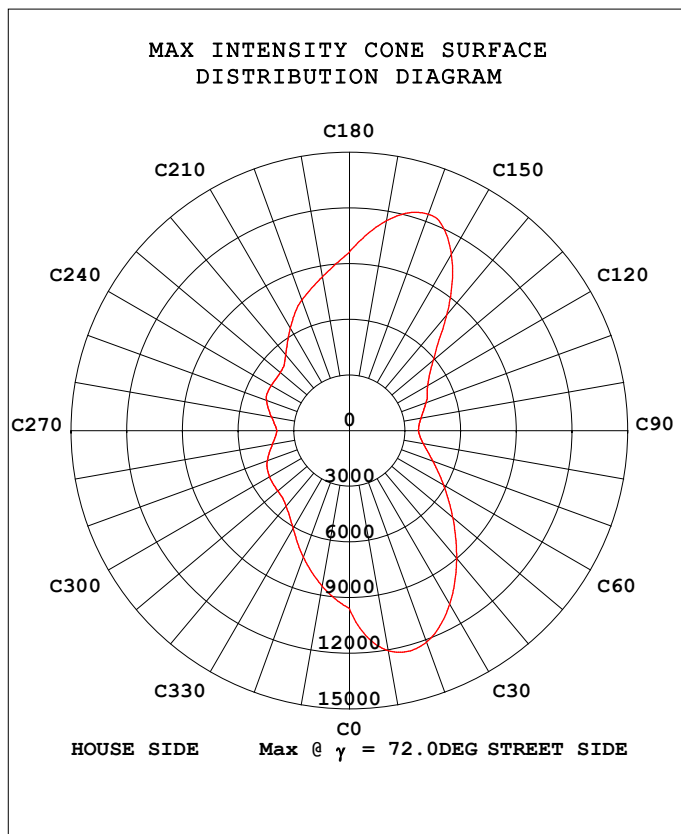


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

STREETLIGHT PHOTOMETRIC TEST REPORT

| | | |
|---|-------|------------------|
| Test:U:119.52V I:2.4832A P:294.88W PF:0.9936 Freq:60.00Hz | | |
| UTHDi:1.92% ITHDi:8.84% KDisp:0.9979 Lamp Flux:44721.2x1 lm | | |
| NAME: streetlight | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: HAVELLS LIGHTING LLC | SUR.: | Shielding Angle: |

| DATA OF LAMP | | PHOTOMETRIC DATA Eff: 151.66 lm/W | | | |
|-------------------|---------------------------------|-----------------------------------|----------|------------------------|---------|
| MODEL | HL-AL-MW-MCCT-ML3-300W-BR-PS-XX | Imax (cd) | 12372 | η street_up (%) | 0.4 |
| NOMINAL POWER (W) | 300 | LOR (%) | 100.0 | η street_down (%) | 57.5 |
| RATED VOLTAGE (V) | 120 | TOTAL FLUX (lm) | 44721 | η house_up (%) | 0.4 |
| NOMINAL FLUX (lm) | 44721.2 | MAXIMUM @ (C, γ) | 158,72.0 | η house_down (%) | 41.7 |
| LAMPS INSIDE | 1 | η up (%) | 0.9 | 76 FLASHAREA (m2) | 0.05000 |
| TEST VOLTAGE (V) | 120 | η down (%) | 99.1 | SLI | 25.594 |

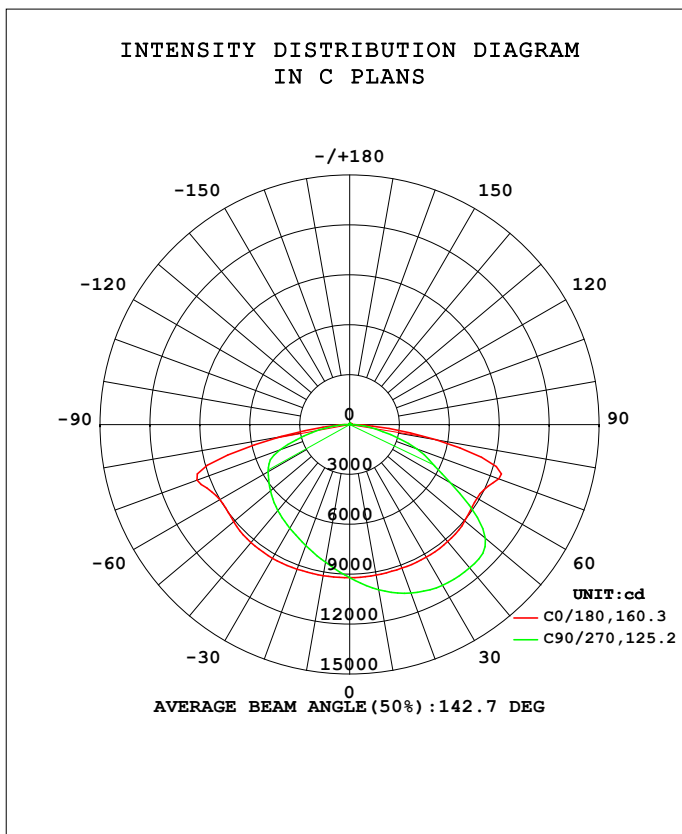


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:21 June 2025

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:6.895m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

STREETLIGHT ISOCANDELA DIAGRAM

| | | |
|--|-------|------------------|
| Test:U:119.52V I:2.4832A P:294.88W PF:0.9936 Freq:60.00Hz UTHDi:1.92% ITHDi:8.84% KDisp:0.9979 Lamp Flux:44721.2x1 lm | | |
| NAME: streetlight | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: EVERFINE | SUR.: | Shielding Angle: |

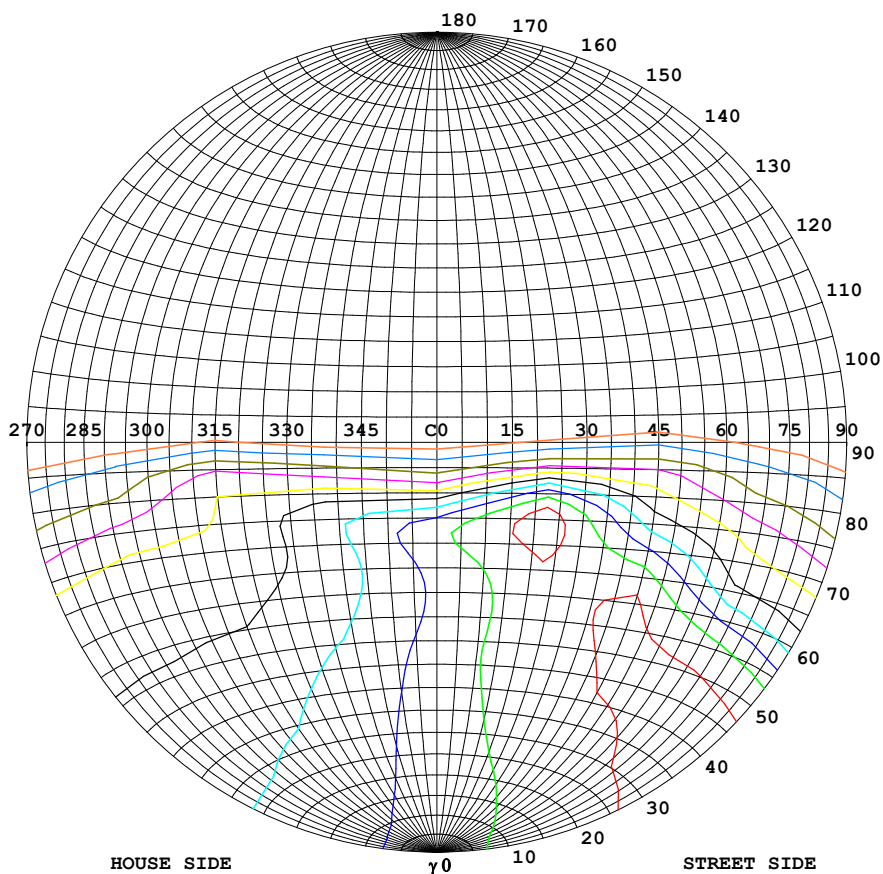

Classification:

IES:Type IV - Medium
CIE:Broad - Long
IES:None cut-off
CIE:Non-cut-off
Max.At80:213.3cd/klm
Max.At90:24.95cd/klm
Max.80-90:213.3cd/klm



| ISOCANDELA DIAGRAM | |
|------------------------|-------|
| UNIT | cd |
| I _{max} =100% | 12372 |
| 90% | 11134 |
| 80% | 9897 |
| 70% | 8660 |
| 60% | 7423 |
| 50% | 6186 |
| 40% | 4949 |
| 30% | 3711 |
| 20% | 2474 |
| 10% | 1237 |
| 5% | 619 |

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:21 June 2025

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:6.895m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

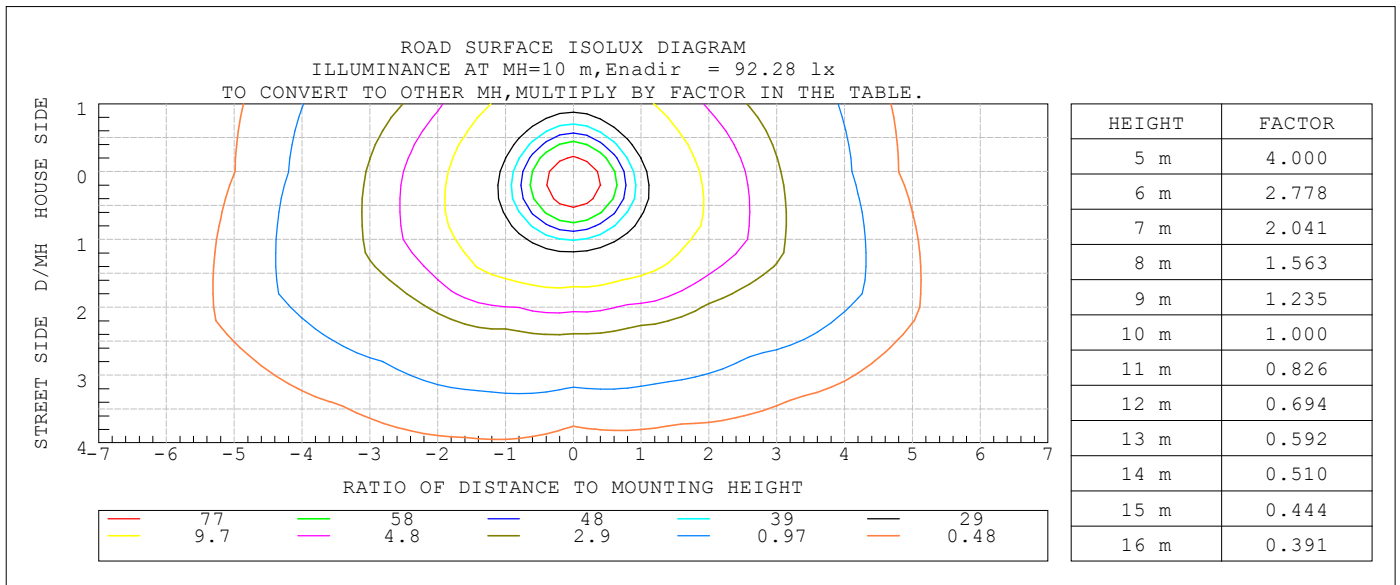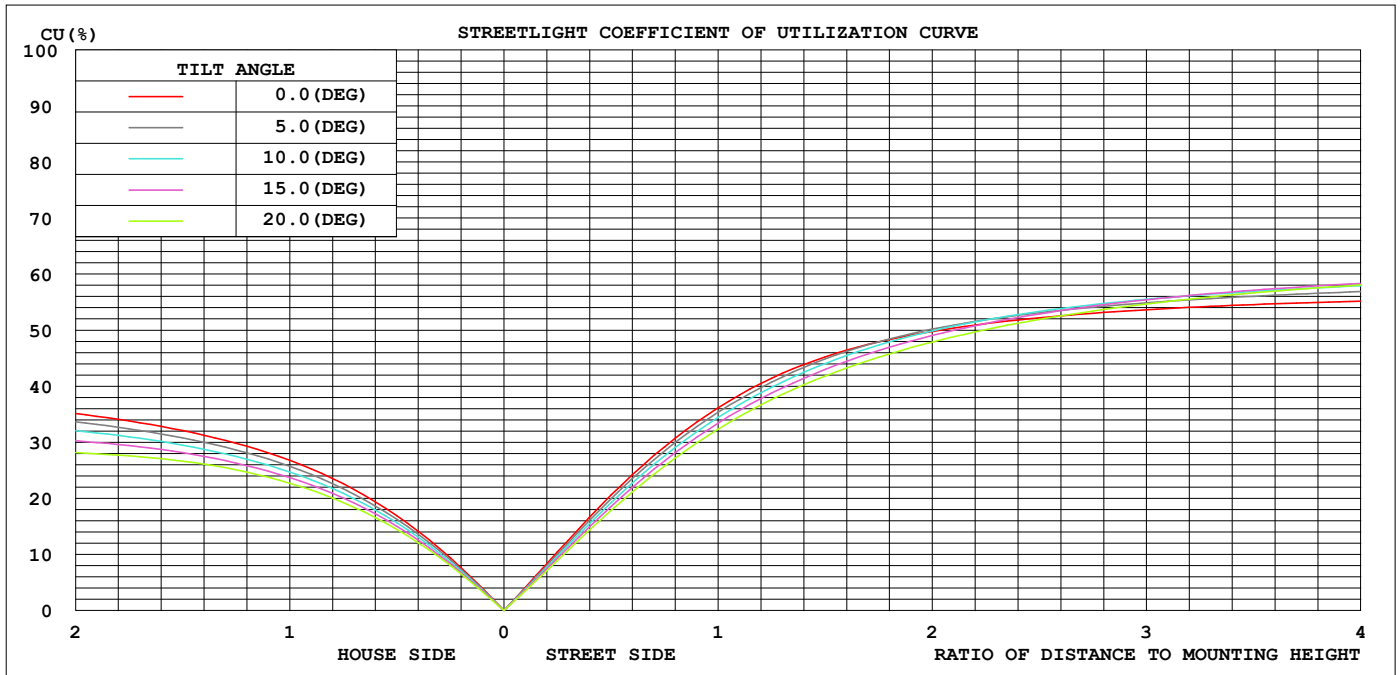

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: DAMIN
Test Date: 21 June 2025

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity: 65.0%
Test Distance: 6.895m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ZONAL FLUX DIAGRAM

| | | |
|---|-------|------------------|
| Test:U:119.52V I:2.4832A P:294.88W PF:0.9936 Freq:60.00Hz | | |
| UTHDi:1.92% ITHDi:8.84% KDisp:0.9979 Lamp Flux:44721.2x1 lm | | |
| NAME: streetlight | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: EVERFINE | SUR.: | Shielding Angle: |

| γ | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 | γ | Φ zone | Φ total | %lum,lamp |
|----------|--------------------------|-------|-------|-------|-------|-------|-------|-------|----------|-------------|--------------|-----------|
| 10 | 918.6 | 981.6 | 1008 | 982.3 | 921.7 | 861.7 | 840.8 | 863.0 | 0- 10 | 879.8 | 879.8 | 1.97,1.97 |
| 20 | 918.6 | 1036 | 1078 | 1036 | 925.1 | 808.0 | 773.7 | 810.1 | 10- 20 | 2617 | 3497 | 7.82,7.82 |
| 30 | 921.3 | 1079 | 1116 | 1075 | 928.3 | 757.6 | 720.0 | 761.8 | 20- 30 | 4269 | 7766 | 17.4,17.4 |
| 40 | 917.9 | 1116 | 1123 | 1104 | 925.2 | 704.7 | 673.5 | 714.0 | 30- 40 | 5757 | 13523 | 30.2,30.2 |
| 50 | 903.3 | 1136 | 1065 | 1124 | 909.9 | 640.9 | 622.5 | 656.0 | 40- 50 | 6975 | 20498 | 45.8,45.8 |
| 60 | 885.1 | 1140 | 697.9 | 1077 | 902.1 | 566.4 | 566.5 | 586.4 | 50- 60 | 7587 | 28085 | 62.8,62.8 |
| 70 | 954.7 | 890.0 | 431.4 | 748.9 | 978.2 | 505.2 | 446.8 | 520.7 | 60- 70 | 7424 | 35509 | 79.4,79.4 |
| 80 | 527.2 | 542.8 | 160.2 | 496.4 | 419.5 | 480.8 | 186.5 | 495.0 | 70- 80 | 6413 | 41922 | 93.7,93.7 |
| 90 | 21.14 | 111.6 | 10.55 | 7.603 | 4.459 | 2.860 | 1.499 | 72.29 | 80- 90 | 2408 | 44330 | 99.1,99.1 |
| 100 | 6.149 | 4.097 | 3.090 | 3.343 | 5.736 | 3.872 | 2.684 | 5.156 | 90-100 | 77.68 | 44408 | 99.3,99.3 |
| 110 | 7.477 | 5.071 | 4.053 | 4.100 | 7.055 | 5.272 | 4.284 | 6.481 | 100-110 | 50.35 | 44458 | 99.4,99.4 |
| 120 | 8.320 | 5.863 | 4.674 | 4.672 | 8.041 | 6.307 | 5.671 | 7.292 | 110-120 | 57.39 | 44515 | 99.5,99.5 |
| 130 | 8.207 | 6.105 | 5.026 | 4.919 | 8.247 | 7.107 | 6.517 | 7.477 | 120-130 | 57.33 | 44573 | 99.7,99.7 |
| 140 | 7.926 | 6.331 | 5.253 | 5.054 | 7.997 | 7.549 | 7.097 | 7.038 | 130-140 | 50.97 | 44624 | 99.8,99.8 |
| 150 | 7.717 | 6.565 | 5.533 | 5.155 | 7.702 | 7.653 | 7.230 | 6.499 | 140-150 | 41.63 | 44665 | 99.9,99.9 |
| 160 | 7.564 | 6.859 | 5.857 | 5.326 | 7.535 | 7.602 | 7.064 | 6.158 | 150-160 | 30.53 | 44696 | 99.9,99.9 |
| 170 | 7.621 | 7.269 | 6.260 | 5.631 | 7.640 | 7.694 | 6.964 | 6.150 | 160-170 | 18.88 | 44715 | 100,100 |
| 180 | 7.686 | 7.565 | 6.670 | 5.950 | 7.687 | 7.568 | 6.679 | 5.955 | 170-180 | 6.499 | 44721 | 100,100 |
| DEG | LUMINOUS INTENSITY:X10cd | | | | | | | | | UNIT:lm | | |

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:DAMIN

Test Date:21 June 2025

γ Range: 0 - 180DEG

γ Interval: 2.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471

Humidity:65.0%


Test Distance:6.895m [K=1.0000]

Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOCANDELA DIAGRAM


| | | |
|--|-------|------------------|
| Test:U:119.52V I:2.4832A P:294.88W PF:0.9936 Freq:60.00Hz UTHDi:1.92% ITHDi:8.84% KDisp:0.9979 Lamp Flux:44721.2x1 lm | | |
| NAME: streetlight | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: EVERFINE | SUR.: | Shielding Angle: |

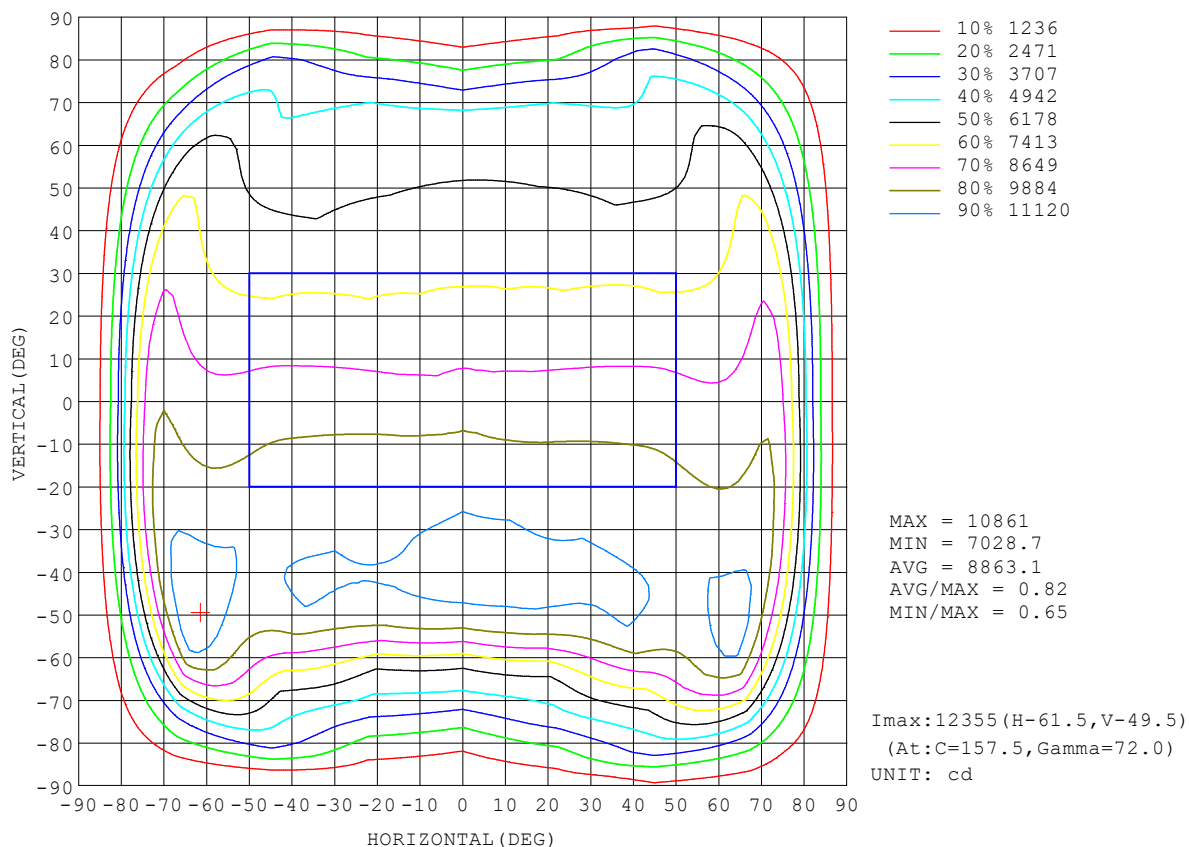

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:21 June 2025

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:6.895m [K=1.0000]
Remarks:

Planar Illuminance Curve

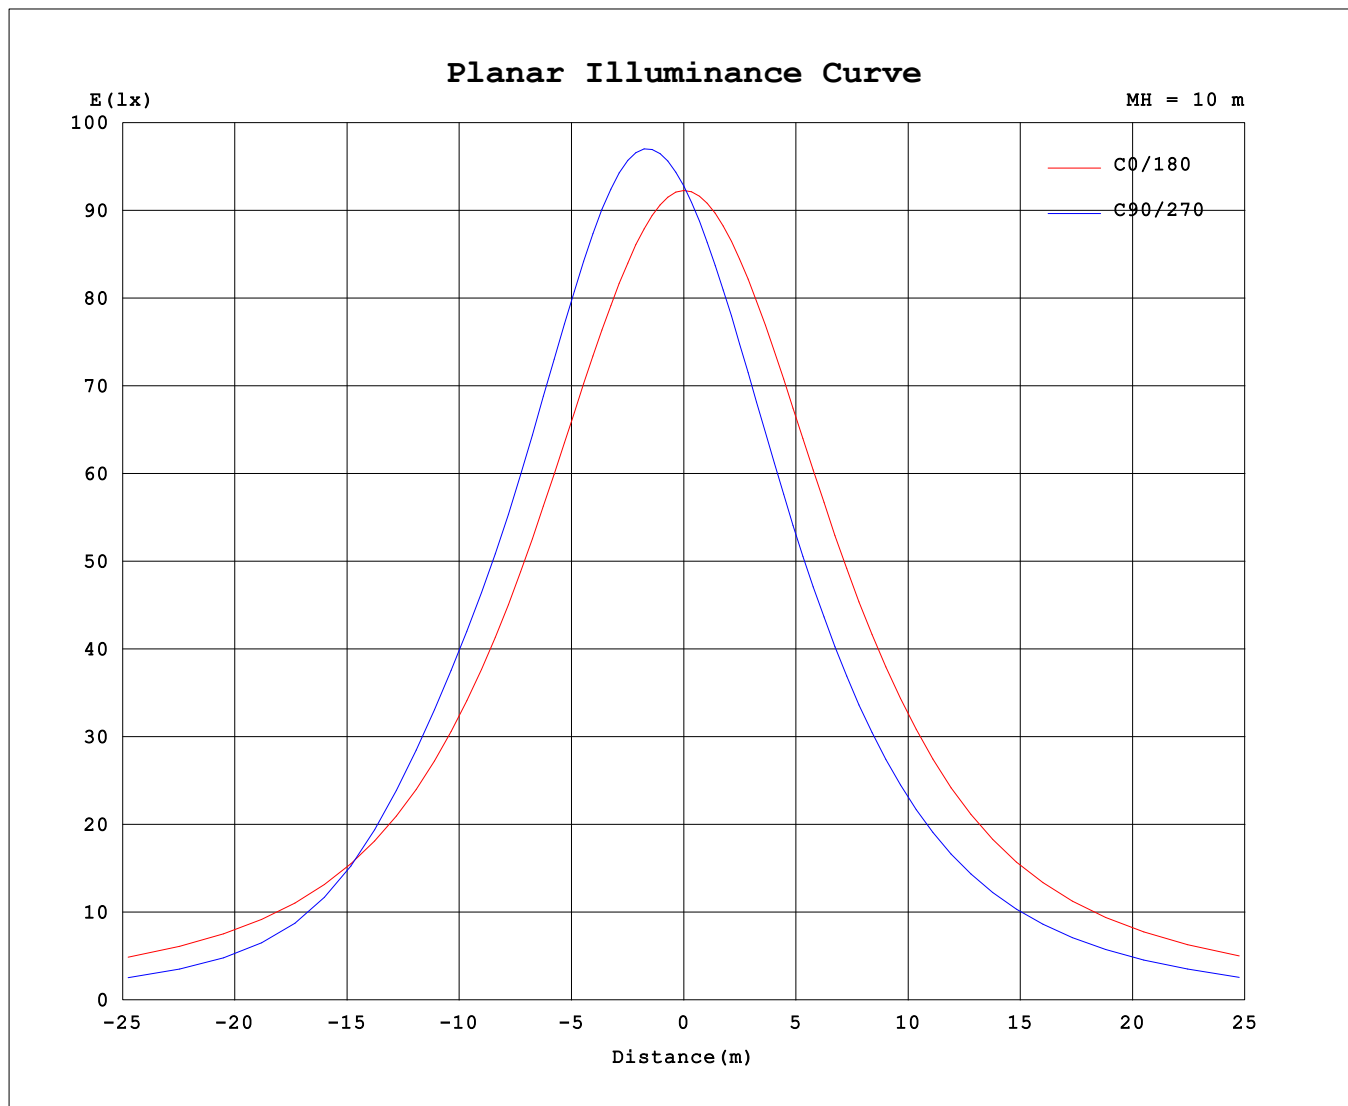

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature: 25.3 °C

Operators: DAMIN

Test Date: 21 June 2025

γ Range: 0 - 180DEG

γ Interval: 2.0DEG

Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.471

Humidity: 65.0%

Test Distance: 6.895m [K=1.0000]


Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LCS REPORT

| | | |
|---|-------|------------------|
| Test:U:119.52V I:2.4832A P:294.88W PF:0.9936 Freq:60.00Hz | | |
| UTHDi:1.92% ITHDi:8.84% KDisp:0.9979 Lamp Flux:44721.2x1 lm | | |
| NAME: streetlight | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: EVERFINE | SUR.: | Shielding Angle: |

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

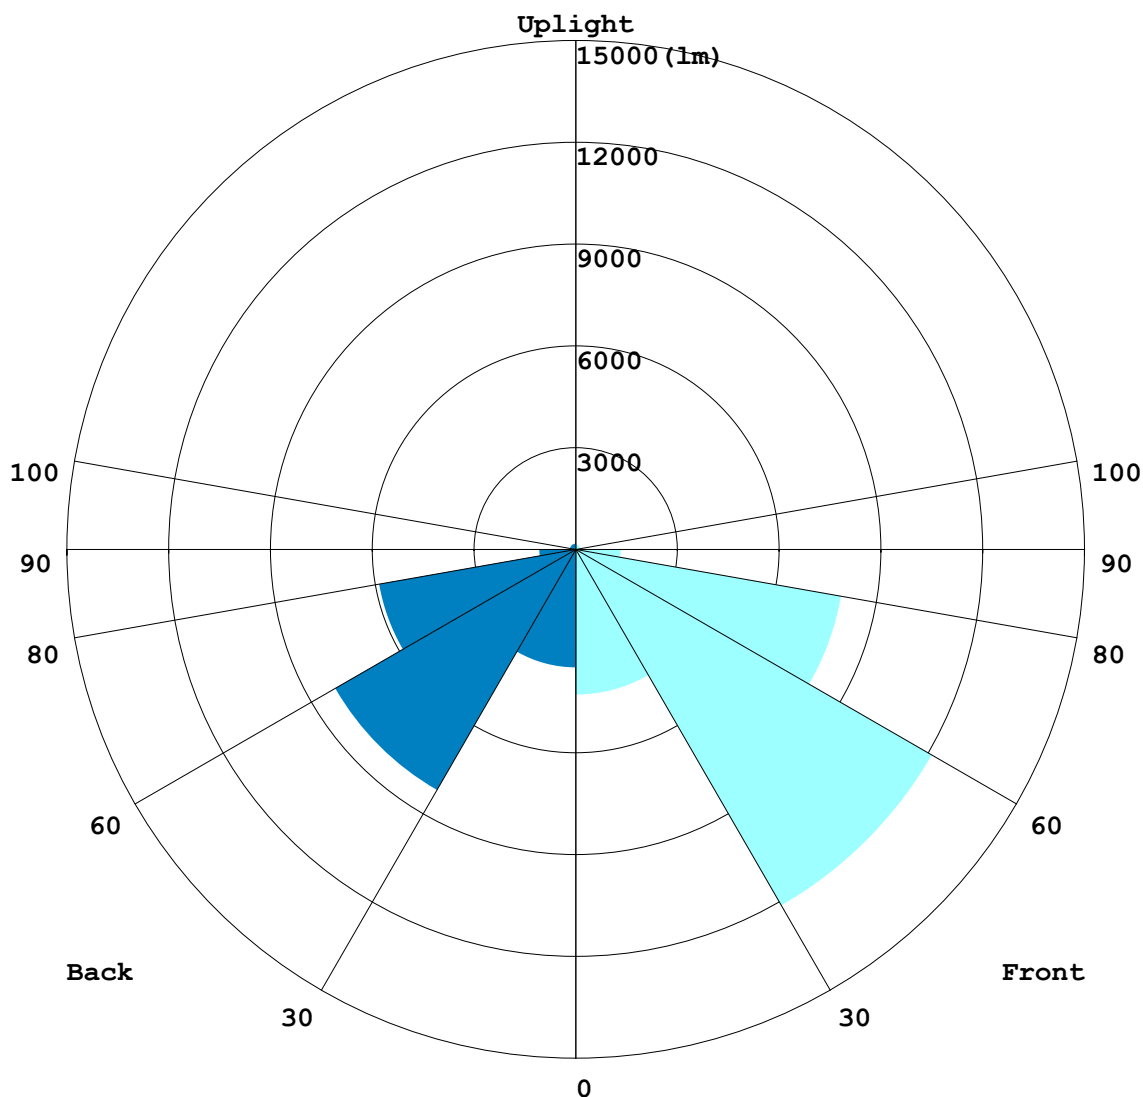

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:21 June 2025

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:6.895m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

BUG REPORT

| | | |
|--|-------|------------------|
| Test:U:119.52V I:2.4832A P:294.88W PF:0.9936 Freq:60.00Hz UTHDi:1.92% ITHDi:8.84% KDisp:0.9979 Lamp Flux:44721.2x1 lm | | |
| NAME: streetlight | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: EVERFINE | SUR.: | Shielding Angle: |

IESNA Luminaire Flux Distribution Table:

| Zone | Lumens | Luminaire % |
|------------------------------|--------|-------------|
| FL - Front-Low(0-30) | 4286.5 | 9.6 |
| FM - Front-Medium(30-60) | 12126 | 27.1 |
| FH - Front-High(60-80) | 7947.3 | 17.8 |
| FVH - Front-Very High(80-90) | 1334.6 | 3.0 |
| Total Forward Light | 25886 | 57.9 |

| | | |
|-----------------------------|--------|------|
| BL - Back-Low(0-30) | 3479.5 | 7.8 |
| BM - Back-Medium(30-60) | 8193.4 | 18.3 |
| BH - Back-High(60-80) | 5889.1 | 13.2 |
| BVH - Back-Very High(80-90) | 1073.5 | 2.4 |
| Total Back Light | 18836 | 42.1 |

| | | |
|----------------------------|--------|-----|
| UL - Uplight-Low(90-100) | 77.681 | 0.2 |
| UH - Uplight-High(100-180) | 313.57 | 0.7 |
| Total Up Light | 391.26 | 0.9 |

| | |
|---------------------------|----------|
| BUG(Back,Up,Glare) Rating | B5-U3-G5 |
|---------------------------|----------|

| Zone | Downward Lumens | Upward Lumens | Total Lumens |
|-------------|--------------------|------------------|-----------------|
| House Side | 18635 | 200.22 | 18836 |
| Street Side | 25694 | 191.03 | 25886 |

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:21 June 2025


γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:6.895m [K=1.0000]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ROAD ISOCANDELA REPORT

| | | |
|--|-------|------------------|
| Test:U:119.52V I:2.4832A P:294.88W PF:0.9936 Freq:60.00Hz UTHDi:1.92% ITHDi:8.84% KDisp:0.9979 Lamp Flux:44721.2x1 lm | | |
| NAME: streetlight | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: EVERFINE | SUR.: | Shielding Angle: |

ROAD SURFACE ISOCANDELA DIAGRAM

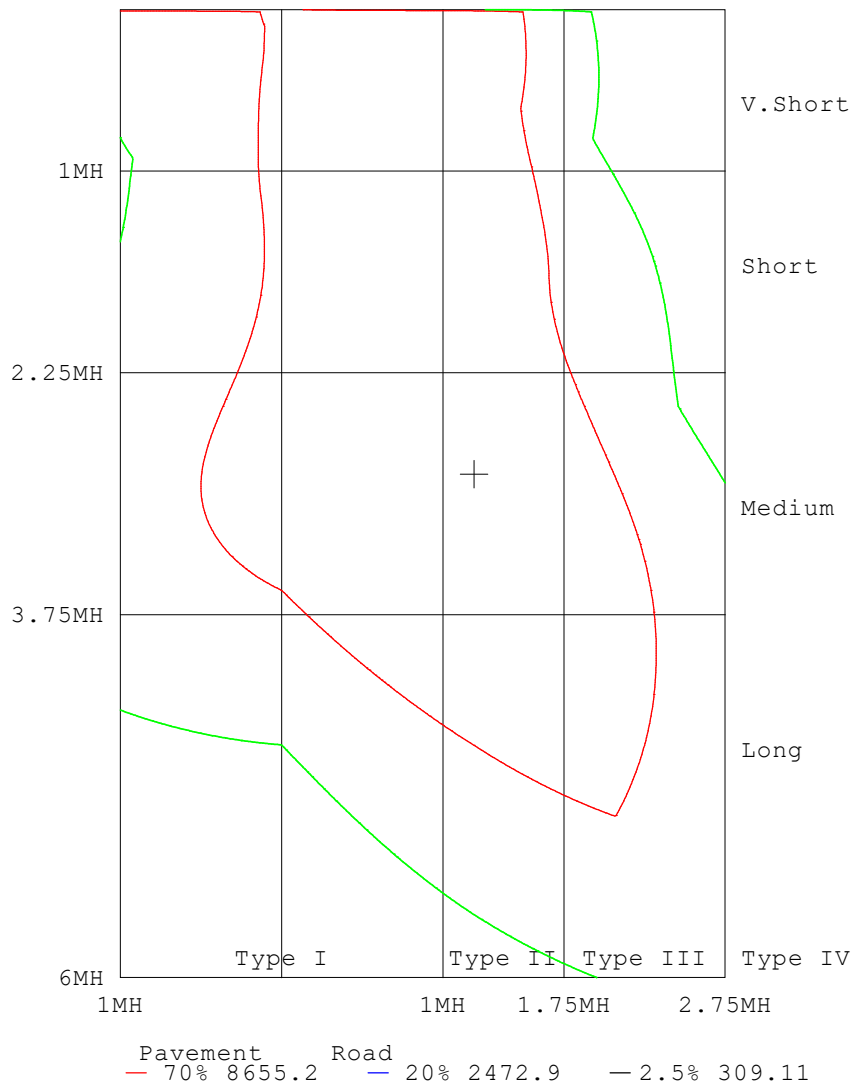

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:21 June 2025

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
 Humidity:65.0%
 Test Distance:6.895m [K=1.0000]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINOUS DISTRIBUTION INTENSITY DATA

| | | |
|---|-------|------------------|
| Test:U:119.52V I:2.4832A P:294.88W PF:0.9936 Freq:60.00Hz | | |
| UTHDi:1.92% ITHDi:8.84% KDisp:0.9979 Lamp Flux:44721.2x1 lm | | |
| NAME: streetlight | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: EVERFINE | SUR.: | Shielding Angle: |

Table--1

UNIT: X10cd

| C (DEG) γ (DEG) | 0 | 22.5 | 45 | 67.5 | 90 | 112.5 | 135 | 157.5 | 180 | 202.5 | 225 | 247.5 | 270 | 292.5 | 315 | 337.5 | | | |
|--------------------|------|------|------|------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|--|--|--|
| 0 | 921 | 921 | 921 | 921 | 921 | 921 | 921 | 921 | 921 | 921 | 921 | 921 | 921 | 921 | 921 | 921 | | | |
| 5 | 920 | 933 | 945 | 953 | 956 | 953 | 945 | 934 | 921 | 909 | 897 | 889 | 887 | 890 | 897 | 908 | | | |
| 10 | 919 | 952 | 982 | 1002 | 1008 | 1001 | 982 | 955 | 922 | 890 | 862 | 845 | 841 | 847 | 863 | 889 | | | |
| 15 | 918 | 964 | 1005 | 1032 | 1039 | 1030 | 1005 | 969 | 923 | 878 | 840 | 817 | 813 | 821 | 841 | 876 | | | |
| 20 | 919 | 984 | 1036 | 1069 | 1078 | 1065 | 1036 | 990 | 925 | 862 | 808 | 779 | 774 | 784 | 810 | 859 | | | |
| 25 | 920 | 999 | 1055 | 1088 | 1096 | 1082 | 1053 | 1005 | 927 | 850 | 788 | 755 | 750 | 760 | 790 | 847 | | | |
| 30 | 921 | 1020 | 1079 | 1110 | 1116 | 1101 | 1075 | 1026 | 928 | 832 | 758 | 724 | 720 | 730 | 762 | 829 | | | |
| 35 | 921 | 1034 | 1095 | 1119 | 1122 | 1107 | 1088 | 1040 | 928 | 818 | 737 | 704 | 701 | 712 | 743 | 816 | | | |
| 40 | 918 | 1055 | 1116 | 1125 | 1123 | 1110 | 1104 | 1061 | 925 | 794 | 705 | 675 | 673 | 685 | 714 | 795 | | | |
| 45 | 915 | 1069 | 1125 | 1128 | 1121 | 1111 | 1110 | 1075 | 922 | 777 | 681 | 654 | 654 | 666 | 692 | 779 | | | |
| 50 | 903 | 1079 | 1136 | 1117 | 1065 | 1084 | 1124 | 1081 | 910 | 744 | 641 | 619 | 622 | 631 | 656 | 749 | | | |
| 55 | 892 | 1079 | 1145 | 1062 | 949 | 1006 | 1131 | 1085 | 901 | 722 | 611 | 594 | 601 | 607 | 629 | 725 | | | |
| 60 | 885 | 1084 | 1140 | 854 | 698 | 781 | 1077 | 1108 | 902 | 695 | 566 | 557 | 566 | 570 | 586 | 693 | | | |
| 65 | 897 | 1101 | 1080 | 687 | 570 | 629 | 967 | 1145 | 922 | 689 | 538 | 535 | 541 | 548 | 558 | 679 | | | |
| 70 | 955 | 1163 | 890 | 531 | 431 | 494 | 749 | 1223 | 978 | 717 | 505 | 508 | 447 | 512 | 521 | 686 | | | |
| 75 | 917 | 1205 | 730 | 466 | 310 | 401 | 617 | 1224 | 890 | 716 | 496 | 448 | 335 | 438 | 506 | 706 | | | |
| 80 | 527 | 954 | 543 | 295 | 160 | 228 | 496 | 812 | 420 | 448 | 481 | 282 | 187 | 267 | 495 | 552 | | | |
| 85 | 238 | 521 | 428 | 184 | 89.3 | 133 | 362 | 351 | 161 | 200 | 342 | 174 | 99.6 | 166 | 414 | 325 | | | |
| 90 | 21.1 | 76.2 | 112 | 45.5 | 10.5 | 28.7 | 7.60 | 4.53 | 4.46 | 14.9 | 2.86 | 42.8 | 1.50 | 5.94 | 72.3 | 27.3 | | | |
| 95 | 4.94 | 4.02 | 3.65 | 2.86 | 2.40 | 2.33 | 2.85 | 3.36 | 4.51 | 4.50 | 2.94 | 1.89 | 1.85 | 2.77 | 4.09 | 4.09 | | | |
| 100 | 6.15 | 5.07 | 4.10 | 3.54 | 3.09 | 2.96 | 3.34 | 3.95 | 5.74 | 5.59 | 3.87 | 2.65 | 2.68 | 3.85 | 5.16 | 5.06 | | | |
| 105 | 6.79 | 5.59 | 4.50 | 3.91 | 3.51 | 3.32 | 3.64 | 4.22 | 6.34 | 6.10 | 4.46 | 3.22 | 3.31 | 4.56 | 5.76 | 5.42 | | | |
| 110 | 7.48 | 6.20 | 5.07 | 4.41 | 4.05 | 3.80 | 4.10 | 4.61 | 7.05 | 6.79 | 5.27 | 4.14 | 4.28 | 5.56 | 6.48 | 5.79 | | | |
| 115 | 7.87 | 6.59 | 5.47 | 4.73 | 4.34 | 4.11 | 4.39 | 4.85 | 7.48 | 7.23 | 5.73 | 4.71 | 4.90 | 6.13 | 6.88 | 6.07 | | | |
| 120 | 8.32 | 7.09 | 5.86 | 5.04 | 4.67 | 4.51 | 4.67 | 5.00 | 8.04 | 7.81 | 6.31 | 5.48 | 5.67 | 6.78 | 7.29 | 6.49 | | | |
| 125 | 8.38 | 7.26 | 5.99 | 5.15 | 4.86 | 4.71 | 4.80 | 5.02 | 8.25 | 8.02 | 6.65 | 5.90 | 6.07 | 7.01 | 7.43 | 6.61 | | | |
| 130 | 8.21 | 7.27 | 6.11 | 5.30 | 5.03 | 4.89 | 4.92 | 5.06 | 8.25 | 8.14 | 7.11 | 6.43 | 6.52 | 7.18 | 7.48 | 6.56 | | | |
| 135 | 8.07 | 7.23 | 6.20 | 5.41 | 5.10 | 4.97 | 4.99 | 5.09 | 8.15 | 8.16 | 7.34 | 6.74 | 6.78 | 7.24 | 7.37 | 6.43 | | | |
| 140 | 7.93 | 7.22 | 6.33 | 5.61 | 5.25 | 5.09 | 5.05 | 5.14 | 8.00 | 8.13 | 7.55 | 7.11 | 7.10 | 7.28 | 7.04 | 6.19 | | | |
| 145 | 7.84 | 7.24 | 6.42 | 5.75 | 5.38 | 5.20 | 5.09 | 5.16 | 7.89 | 8.07 | 7.62 | 7.25 | 7.22 | 7.22 | 6.80 | 6.03 | | | |
| 150 | 7.72 | 7.23 | 6.57 | 5.96 | 5.53 | 5.30 | 5.16 | 5.19 | 7.70 | 7.91 | 7.65 | 7.32 | 7.23 | 7.01 | 6.50 | 5.79 | | | |
| 155 | 7.63 | 7.25 | 6.68 | 6.10 | 5.65 | 5.39 | 5.22 | 5.22 | 7.60 | 7.81 | 7.63 | 7.32 | 7.17 | 6.84 | 6.33 | 5.68 | | | |
| 160 | 7.56 | 7.30 | 6.86 | 6.33 | 5.86 | 5.54 | 5.33 | 5.27 | 7.54 | 7.72 | 7.60 | 7.29 | 7.06 | 6.63 | 6.16 | 5.60 | | | |
| 165 | 7.56 | 7.37 | 7.01 | 6.51 | 6.02 | 5.68 | 5.42 | 5.34 | 7.55 | 7.73 | 7.61 | 7.28 | 7.00 | 6.57 | 6.12 | 5.61 | | | |
| 170 | 7.62 | 7.56 | 7.27 | 6.75 | 6.26 | 5.88 | 5.63 | 5.50 | 7.64 | 7.78 | 7.69 | 7.33 | 6.96 | 6.53 | 6.15 | 5.72 | | | |
| 175 | 7.68 | 7.66 | 7.41 | 6.90 | 6.44 | 6.04 | 5.78 | 5.60 | 7.70 | 7.80 | 7.68 | 7.28 | 6.90 | 6.46 | 6.11 | 5.75 | | | |
| 180 | 7.69 | 7.74 | 7.57 | 7.11 | 6.67 | 6.26 | 5.95 | 5.69 | 7.69 | 7.74 | 7.57 | 7.11 | 6.68 | 6.26 | 5.96 | 5.70 | | | |

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:DAMIN

Test Date:21 June 2025

γ Range: 0 - 180DEG

γ Interval: 2.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471

Humidity:65.0%

Test Distance:6.895m [K=1.0000]

Remarks: