
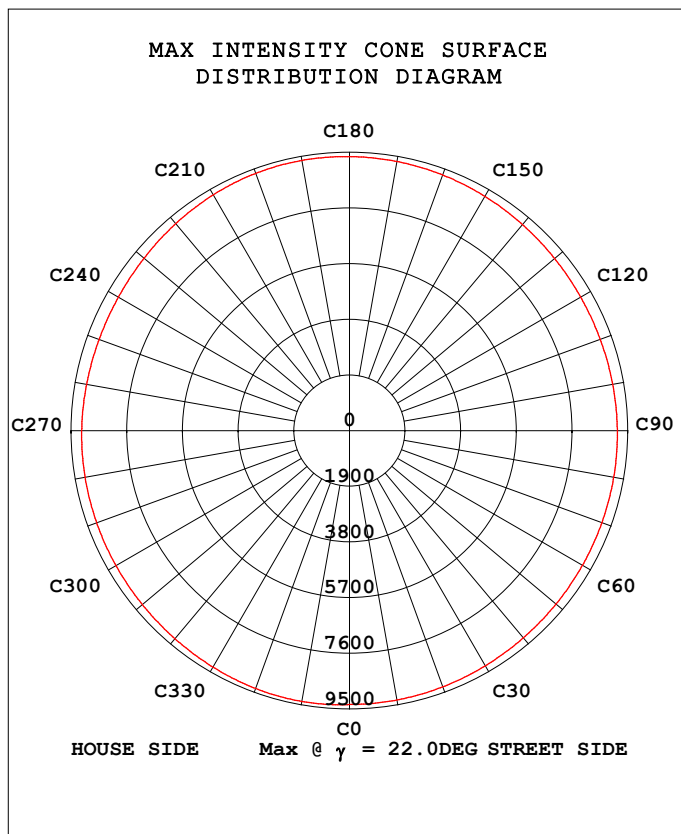


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

STREETLIGHT PHOTOMETRIC TEST REPORT

| | | |
|---|-------|------------------|
| Test:U:119.45V I:2.6001A P:308.52W PF:0.9934 Freq:60.00Hz | | |
| UTHDi:2.03% ITHDi:8.81% KDisp:0.9980 Lamp Flux:47459.3x1 lm | | |
| NAME: streetlight | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: HAVELLS LIGHTING LLC | SUR.: | Shielding Angle: |

| DATA OF LAMP | | PHOTOMETRIC DATA Eff: 153.83 lm/W | | | |
|-------------------|---------------------------------|-----------------------------------|----------|------------------------|---------|
| MODEL | HL-AL-MW-MCCT-ML3-300W-BR-PS-XX | Imax (cd) | 9356 | η street_up (%) | 0.5 |
| NOMINAL POWER (W) | 300 | LOR (%) | 100.0 | η street_down (%) | 49.9 |
| RATED VOLTAGE (V) | 120 | TOTAL FLUX (lm) | 47459 | η house_up (%) | 0.4 |
| NOMINAL FLUX (lm) | 47459.3 | MAXIMUM @ (C, γ) | 338,22.0 | η house_down (%) | 49.1 |
| LAMPS INSIDE | 1 | η up (%) | 0.9 | 76 FLASHAREA (m2) | 0.05000 |
| TEST VOLTAGE (V) | 120 | η down (%) | 99.1 | SLI | 25.486 |

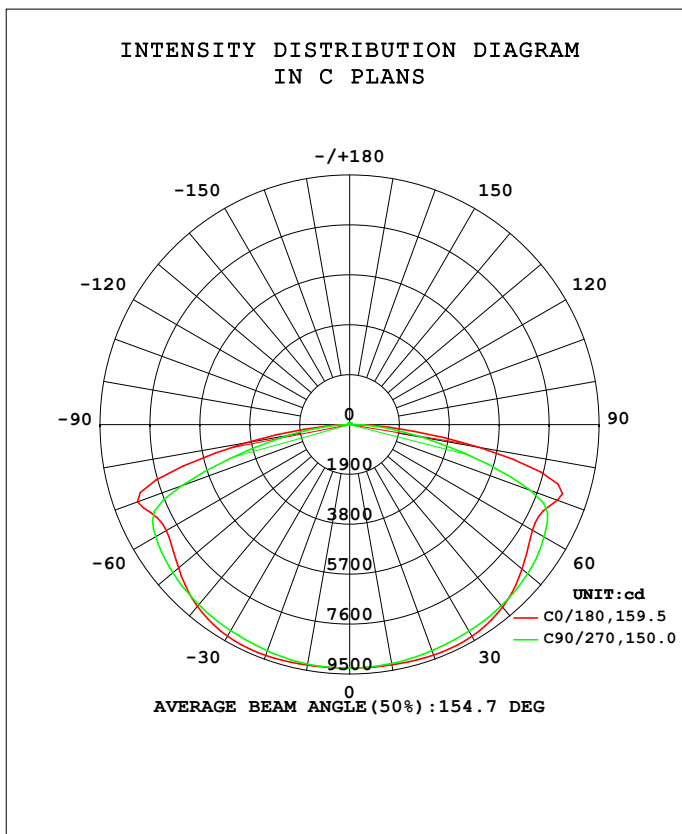


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: DAMIN
Test Date: 21 June 2025

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity: 65.0%
Test Distance: 6.895m [K=1.0442]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

STREETLIGHT ISOCANDELA DIAGRAM

| | | |
|--|-------|------------------|
| Test:U:119.45V I:2.6001A P:308.52W PF:0.9934 Freq:60.00Hz UTHDi:2.03% ITHDi:8.81% KDisp:0.9980 Lamp Flux:47459.3x1 lm | | |
| NAME: streetlight | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: EVERFINE | SUR.: | Shielding Angle: |

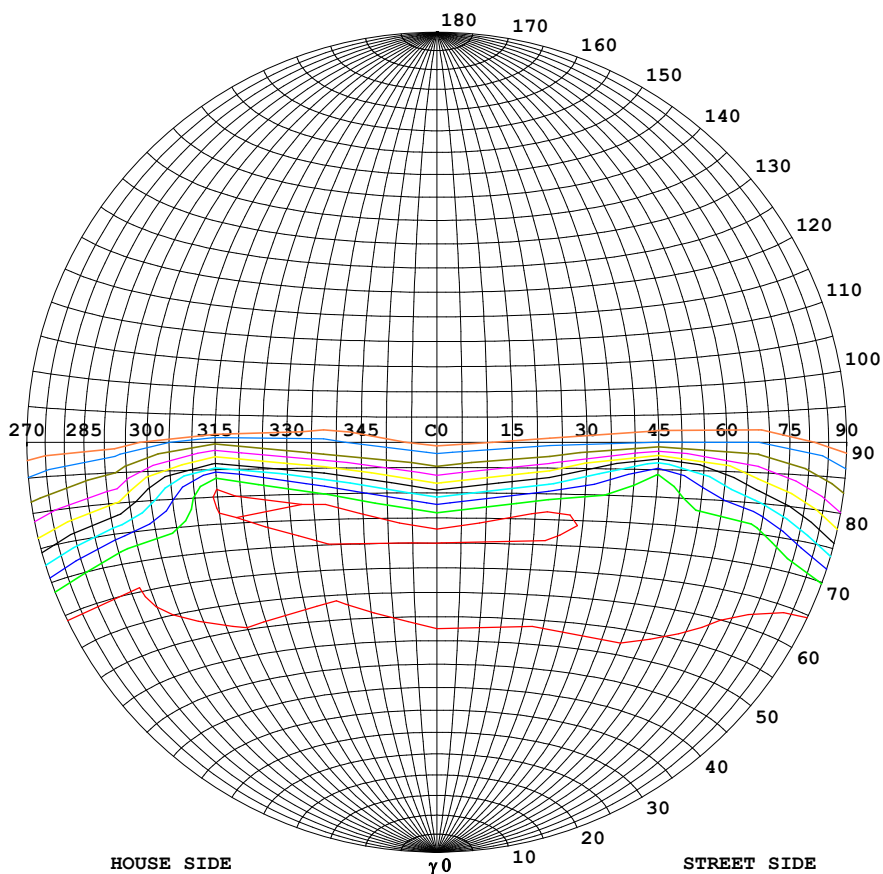

Classification:

IES:Type VS - Very Short
 CIE:Broad - Short
 IES:None cut-off
 CIE:Non-cut-off
 Max.At80:181.0cd/klm
 Max.At90:33.86cd/klm
 Max.80-90:181.0cd/klm


| ISOCANDELA DIAGRAM | |
|--------------------|------|
| UNIT | cd |
| Imax=100% | 9356 |
| 90% | 8420 |
| 80% | 7485 |
| 70% | 6549 |
| 60% | 5614 |
| 50% | 4678 |
| 40% | 3742 |
| 30% | 2807 |
| 20% | 1871 |
| 10% | 936 |
| 5% | 468 |

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:21 June 2025

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
 Humidity:65.0%
 Test Distance:6.895m [K=1.0442]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

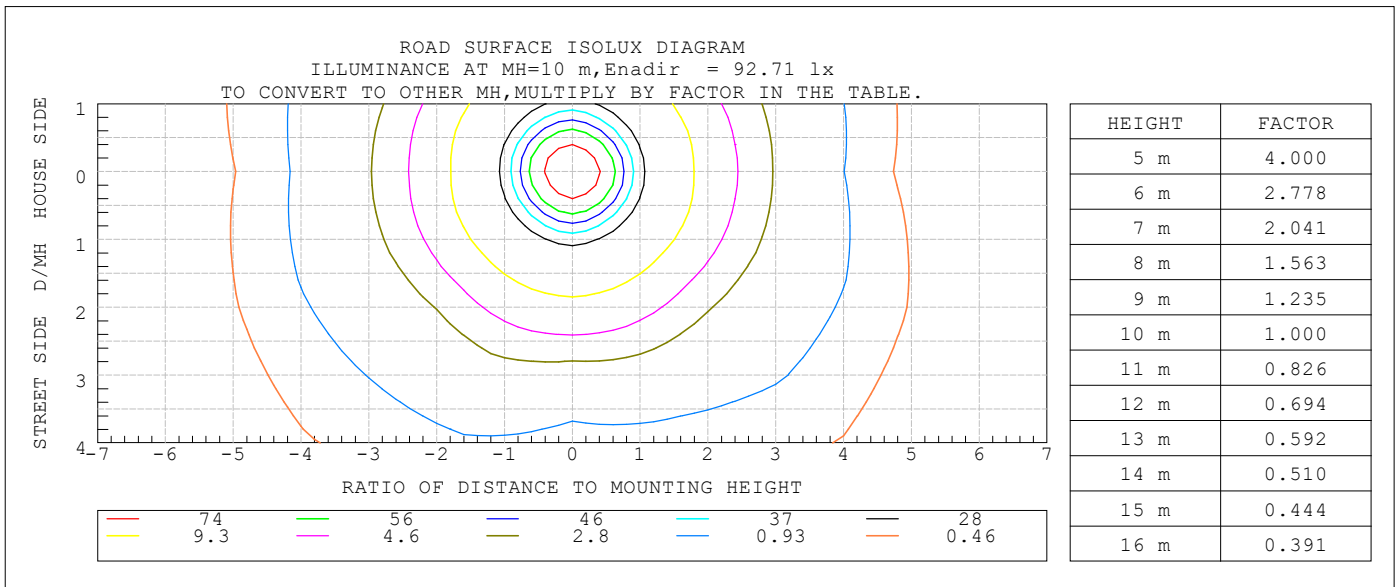

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature: 25.3°C

Operators: DAMIN

Test Date: 21 June 2025

γ Range: 0 - 180DEG

γ Interval: 2.0DEG

Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.471

Humidity: 65.0%

Test Distance: 6.895m [K=1.0442]

Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ZONAL FLUX DIAGRAM

| | | |
|---|-------|------------------|
| Test:U:119.45V I:2.6001A P:308.52W PF:0.9934 Freq:60.00Hz | | |
| UTHDi:2.03% ITHDi:8.81% KDisp:0.9980 Lamp Flux:47459.3x1 lm | | |
| NAME: streetlight | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: EVERFINE | SUR.: | Shielding Angle: |

| γ | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 | γ | Φ zone | Φ total | %lum,lamp |
|-----|-----------------------|-------|-------|-------|-------|-------|-------|-------|---------|---------|---------|-----------|
| 10 | 9283 | 9263 | 9237 | 9245 | 9296 | 9257 | 9254 | 9293 | 0- 10 | 884.7 | 884.7 | 1.86,1.86 |
| 20 | 9338 | 9231 | 9160 | 9187 | 9353 | 9211 | 9167 | 9266 | 10- 20 | 2624 | 3508 | 7.39,7.39 |
| 30 | 9307 | 9129 | 9080 | 9034 | 9303 | 9072 | 9059 | 9144 | 20- 30 | 4257 | 7765 | 16.4,16.4 |
| 40 | 9065 | 8945 | 8994 | 8807 | 9027 | 8828 | 8945 | 8944 | 30- 40 | 5690 | 13455 | 28.4,28.4 |
| 50 | 8565 | 8640 | 8844 | 8472 | 8503 | 8442 | 8789 | 8615 | 40- 50 | 6813 | 20268 | 42.7,42.7 |
| 60 | 8041 | 8179 | 8547 | 8049 | 8065 | 7962 | 8532 | 8196 | 50- 60 | 7562 | 27830 | 58.6,58.6 |
| 70 | 8423 | 7831 | 7346 | 7838 | 8595 | 7721 | 6814 | 7978 | 60- 70 | 8095 | 35926 | 75.7,75.7 |
| 80 | 5017 | 8193 | 2801 | 8404 | 3979 | 8102 | 2378 | 8588 | 70- 80 | 7650 | 43576 | 91.8,91.8 |
| 90 | 228.2 | 962.1 | 187.4 | 898.1 | 42.88 | 43.05 | 24.09 | 1607 | 80- 90 | 3439 | 47015 | 99.1,99.1 |
| 100 | 51.28 | 51.92 | 46.40 | 49.39 | 48.21 | 47.64 | 38.66 | 45.11 | 90-100 | 125.4 | 47140 | 99.3,99.3 |
| 110 | 61.61 | 61.07 | 59.51 | 58.54 | 58.26 | 57.21 | 50.04 | 53.69 | 100-110 | 55.48 | 47196 | 99.4,99.4 |
| 120 | 67.51 | 68.00 | 65.65 | 65.03 | 66.16 | 64.20 | 57.49 | 60.31 | 110-120 | 60.44 | 47256 | 99.6,99.6 |
| 130 | 67.62 | 68.13 | 67.17 | 65.97 | 68.31 | 66.15 | 61.08 | 61.27 | 120-130 | 58.24 | 47315 | 99.7,99.7 |
| 140 | 67.16 | 67.89 | 66.17 | 64.90 | 67.74 | 65.24 | 61.60 | 60.13 | 130-140 | 50.32 | 47365 | 99.8,99.8 |
| 150 | 66.74 | 67.47 | 65.77 | 63.43 | 66.38 | 64.39 | 60.79 | 59.39 | 140-150 | 40.42 | 47405 | 99.9,99.9 |
| 160 | 66.18 | 67.53 | 65.25 | 62.77 | 65.78 | 64.75 | 61.01 | 59.91 | 150-160 | 29.49 | 47435 | 99.9,99.9 |
| 170 | 67.25 | 68.89 | 65.25 | 63.49 | 67.45 | 67.52 | 63.45 | 62.92 | 160-170 | 18.25 | 47453 | 100,100 |
| 180 | 68.10 | 68.93 | 64.93 | 64.04 | 68.11 | 68.91 | 64.95 | 64.05 | 170-180 | 6.286 | 47459 | 100,100 |
| DEG | LUMINOUS INTENSITY:cd | | | | | | | | | UNIT:lm | | |


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:21 June 2025

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
 Humidity:65.0%
 Test Distance:6.895m [K=1.0442]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOCANDELA DIAGRAM


| | | |
|--|-------|------------------|
| Test:U:119.45V I:2.6001A P:308.52W PF:0.9934 Freq:60.00Hz UTHDi:2.03% ITHDi:8.81% KDisp:0.9980 Lamp Flux:47459.3x1 lm | | |
| NAME: streetlight | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: EVERFINE | SUR.: | Shielding Angle: |

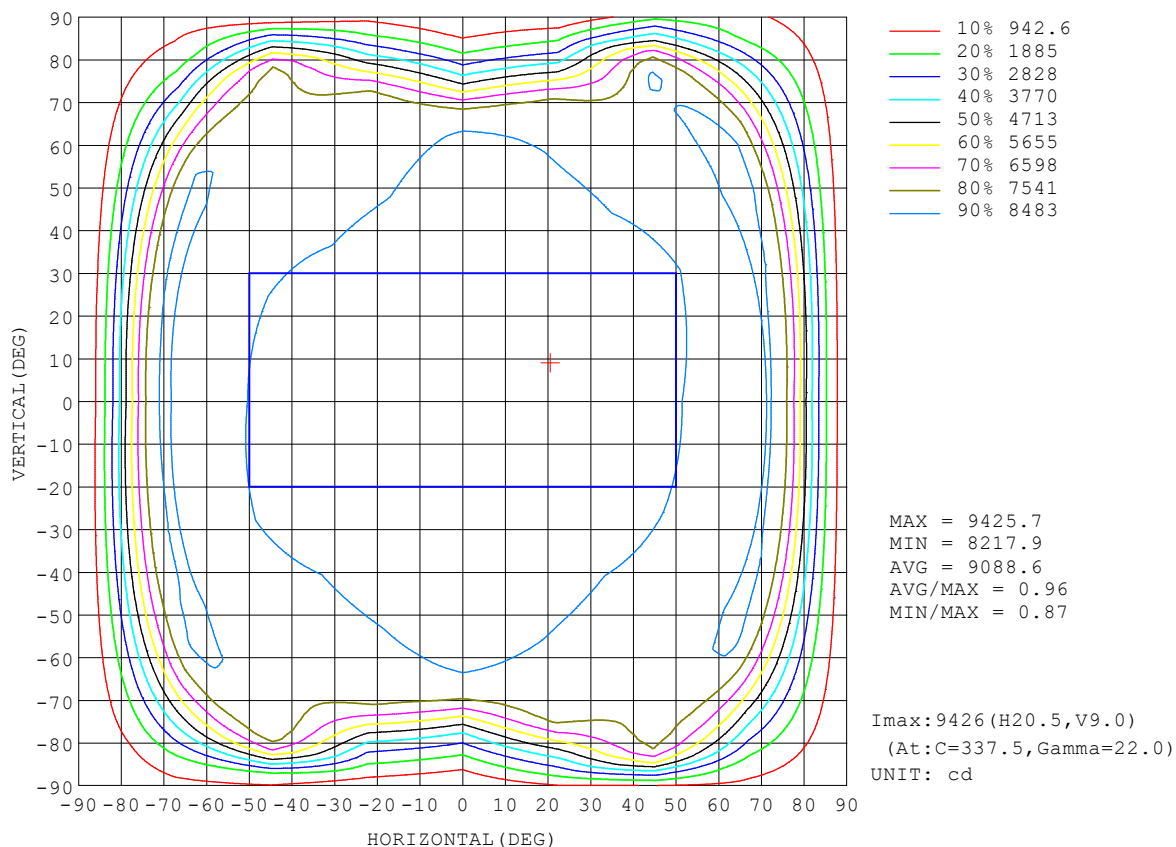

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:21 June 2025

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:6.895m [K=1.0442]
Remarks:

Planar Illuminance Curve

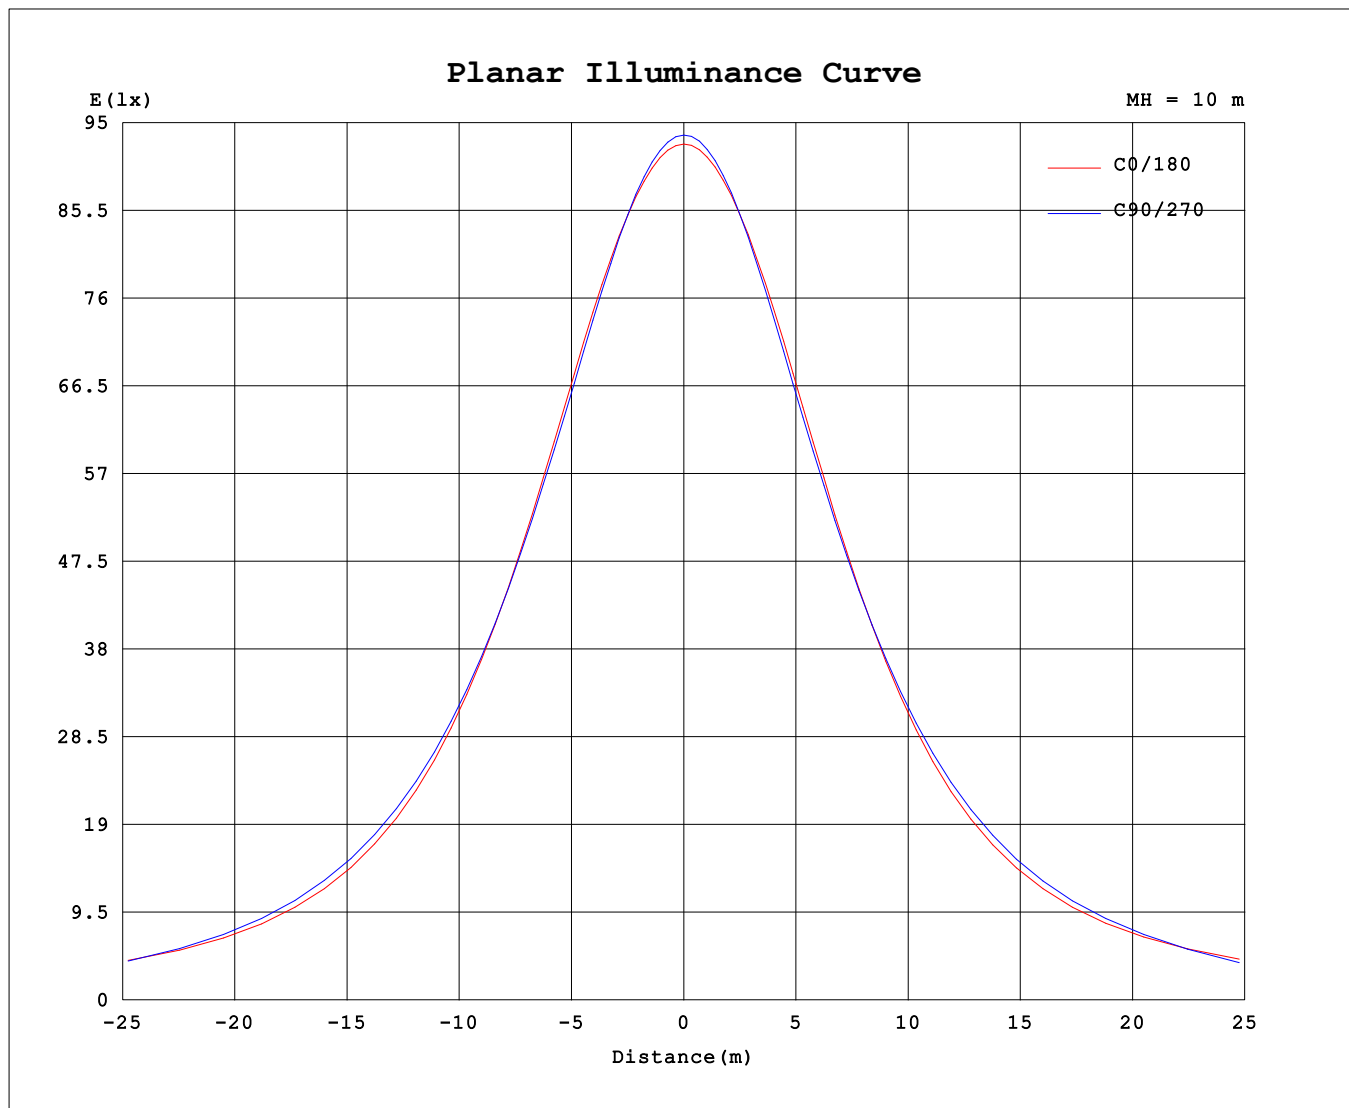

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature: 25.3 °C

Operators: DAMIN

Test Date: 21 June 2025

γ Range: 0 - 180DEG

γ Interval: 2.0DEG

Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.471

Humidity: 65.0%

Test Distance: 6.895m [K=1.0442]


Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LCS REPORT

| | | |
|---|-------|------------------|
| Test:U:119.45V I:2.6001A P:308.52W PF:0.9934 Freq:60.00Hz | | |
| UTHDi:2.03% ITHDi:8.81% KDisp:0.9980 Lamp Flux:47459.3x1 lm | | |
| NAME: streetlight | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: EVERFINE | SUR.: | Shielding Angle: |

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

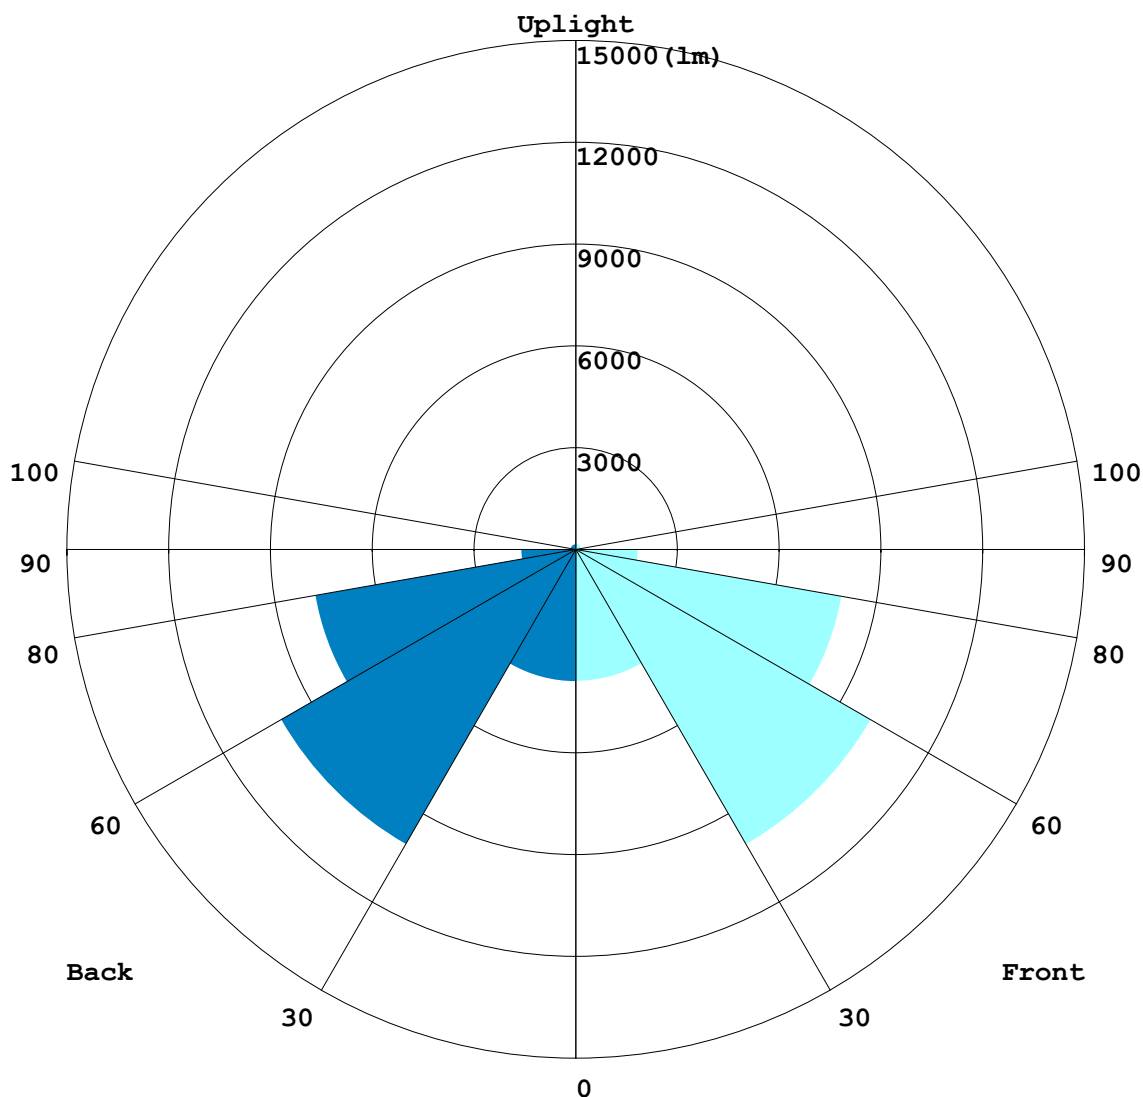

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:21 June 2025

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:6.895m [K=1.0442]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

BUG REPORT

| | | |
|--|-------|------------------|
| Test:U:119.45V I:2.6001A P:308.52W PF:0.9934 Freq:60.00Hz UTHDi:2.03% ITHDi:8.81% KDisp:0.9980 Lamp Flux:47459.3x1 lm | | |
| NAME: streetlight | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: EVERFINE | SUR.: | Shielding Angle: |

IESNA Luminaire Flux Distribution Table:

| Zone | Lumens | Luminaire % |
|------------------------------|--------|-------------|
| FL - Front-Low(0-30) | 3878 | 8.2 |
| FM - Front-Medium(30-60) | 10039 | 21.2 |
| FH - Front-High(60-80) | 7948.6 | 16.7 |
| FVH - Front-Very High(80-90) | 1832.9 | 3.9 |
| Total Forward Light | 23935 | 50.4 |

| | | |
|-----------------------------|--------|------|
| BL - Back-Low(0-30) | 3887.2 | 8.2 |
| BM - Back-Medium(30-60) | 10026 | 21.1 |
| BH - Back-High(60-80) | 7796.9 | 16.4 |
| BVH - Back-Very High(80-90) | 1606.4 | 3.4 |
| Total Back Light | 23525 | 49.6 |

| | | |
|----------------------------|--------|-----|
| UL - Uplight-Low(90-100) | 125.38 | 0.3 |
| UH - Uplight-High(100-180) | 318.92 | 0.7 |
| Total Up Light | 444.3 | 0.9 |

| | |
|---------------------------|----------|
| BUG(Back,Up,Glare) Rating | B5-U3-G5 |
|---------------------------|----------|

| Zone | Downward Lumens | Upward Lumens | Total Lumens |
|-------------|--------------------|------------------|-----------------|
| House Side | 23316 | 208.29 | 23525 |
| Street Side | 23699 | 236.01 | 23935 |

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:21 June 2025


γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:6.895m [K=1.0442]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ROAD ISOCANDELA REPORT

| | | |
|--|-------|------------------|
| Test:U:119.45V I:2.6001A P:308.52W PF:0.9934 Freq:60.00Hz UTHDi:2.03% ITHDi:8.81% KDisp:0.9980 Lamp Flux:47459.3x1 lm | | |
| NAME: streetlight | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: EVERFINE | SUR.: | Shielding Angle: |

ROAD SURFACE ISOCANDELA DIAGRAM

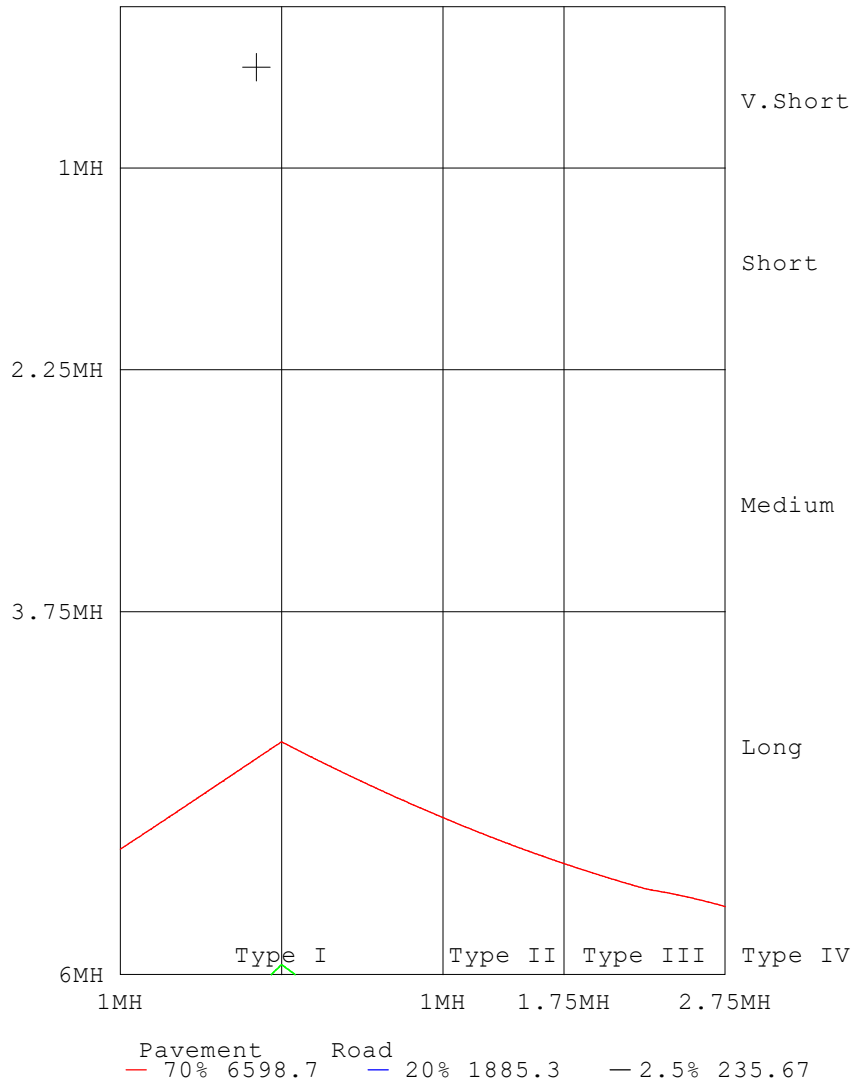

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:DAMIN
Test Date:21 June 2025

Range: 0 - 180DEG
Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471
Humidity:65.0%
Test Distance:6.895m [K=1.0442]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINOUS DISTRIBUTION INTENSITY DATA

| | | |
|---|-------|------------------|
| Test:U:119.45V I:2.6001A P:308.52W PF:0.9934 Freq:60.00Hz | | |
| UTHDi:2.03% ITHDi:8.81% KDisp:0.9980 Lamp Flux:47459.3x1 lm | | |
| NAME: streetlight | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: EVERFINE | SUR.: | Shielding Angle: |

Table--1

UNIT: cd

| C (DEG) γ (DEG) | 0 | 22.5 | 45 | 67.5 | 90 | 112.5 | 135 | 157.5 | 180 | 202.5 | 225 | 247.5 | 270 | 292.5 | 315 | 337.5 | | | |
|--------------------|------|------|------|------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|--|--|--|
| 0 | 9270 | 9270 | 9270 | 9270 | 9270 | 9270 | 9270 | 9270 | 9270 | 9270 | 9270 | 9270 | 9270 | 9270 | 9270 | 9270 | | | |
| 5 | 9269 | 9267 | 9270 | 9271 | 9263 | 9254 | 9261 | 9263 | 9274 | 9275 | 9267 | 9261 | 9270 | 9279 | 9281 | 9281 | | | |
| 10 | 9283 | 9269 | 9263 | 9257 | 9237 | 9224 | 9245 | 9269 | 9296 | 9293 | 9257 | 9232 | 9254 | 9280 | 9293 | 9307 | | | |
| 15 | 9304 | 9279 | 9255 | 9239 | 9212 | 9196 | 9231 | 9280 | 9320 | 9314 | 9248 | 9198 | 9229 | 9264 | 9293 | 9330 | | | |
| 20 | 9338 | 9296 | 9231 | 9193 | 9160 | 9133 | 9187 | 9285 | 9353 | 9337 | 9211 | 9126 | 9167 | 9214 | 9266 | 9354 | | | |
| 25 | 9345 | 9295 | 9202 | 9154 | 9123 | 9083 | 9134 | 9270 | 9356 | 9338 | 9168 | 9063 | 9117 | 9164 | 9228 | 9353 | | | |
| 30 | 9307 | 9259 | 9129 | 9085 | 9080 | 9002 | 9034 | 9207 | 9303 | 9291 | 9072 | 8962 | 9059 | 9093 | 9144 | 9315 | | | |
| 35 | 9240 | 9205 | 9064 | 9040 | 9055 | 8949 | 8953 | 9134 | 9218 | 9222 | 8988 | 8892 | 9020 | 9043 | 9076 | 9264 | | | |
| 40 | 9065 | 9070 | 8945 | 8947 | 8994 | 8841 | 8807 | 8984 | 9027 | 9061 | 8828 | 8760 | 8945 | 8934 | 8944 | 9131 | | | |
| 45 | 8897 | 8952 | 8841 | 8858 | 8942 | 8746 | 8684 | 8861 | 8842 | 8914 | 8692 | 8648 | 8889 | 8843 | 8825 | 9014 | | | |
| 50 | 8565 | 8705 | 8640 | 8708 | 8844 | 8587 | 8472 | 8607 | 8503 | 8625 | 8442 | 8487 | 8789 | 8691 | 8615 | 8759 | | | |
| 55 | 8330 | 8519 | 8463 | 8599 | 8748 | 8473 | 8304 | 8426 | 8285 | 8436 | 8252 | 8382 | 8701 | 8585 | 8448 | 8568 | | | |
| 60 | 8041 | 8276 | 8179 | 8422 | 8547 | 8291 | 8049 | 8215 | 8065 | 8208 | 7962 | 8247 | 8532 | 8430 | 8196 | 8313 | | | |
| 65 | 8001 | 8203 | 7999 | 8332 | 8375 | 8202 | 7907 | 8163 | 8133 | 8203 | 7803 | 8228 | 8357 | 8374 | 8051 | 8212 | | | |
| 70 | 8423 | 8464 | 7831 | 8377 | 7346 | 8020 | 7838 | 8378 | 8595 | 8630 | 7721 | 8303 | 6814 | 8095 | 7978 | 8345 | | | |
| 75 | 8250 | 8810 | 7867 | 8223 | 5463 | 6888 | 8044 | 8633 | 7666 | 8598 | 7885 | 7539 | 4794 | 6741 | 8145 | 8689 | | | |
| 80 | 5017 | 6957 | 8193 | 5853 | 2801 | 4001 | 8404 | 6963 | 3979 | 5452 | 8102 | 4715 | 2378 | 3767 | 8588 | 7414 | | | |
| 85 | 2467 | 4091 | 7631 | 3756 | 1507 | 2350 | 6672 | 4207 | 1770 | 2562 | 5775 | 2805 | 1172 | 2157 | 7121 | 4636 | | | |
| 90 | 228 | 727 | 962 | 915 | 187 | 515 | 898 | 686 | 42.9 | 483 | 43.1 | 666 | 24.1 | 62.3 | 1607 | 1100 | | | |
| 95 | 41.9 | 39.4 | 46.4 | 43.6 | 36.4 | 33.7 | 42.9 | 47.6 | 38.5 | 44.1 | 40.7 | 30.4 | 28.9 | 36.9 | 39.6 | 36.9 | | | |
| 100 | 51.3 | 49.1 | 51.9 | 52.8 | 46.4 | 43.1 | 49.4 | 54.9 | 48.2 | 52.6 | 47.6 | 38.9 | 38.7 | 45.5 | 45.1 | 42.4 | | | |
| 105 | 56.4 | 53.7 | 55.9 | 57.2 | 52.5 | 48.3 | 53.0 | 58.0 | 52.9 | 56.4 | 51.5 | 43.2 | 44.0 | 49.7 | 48.6 | 45.5 | | | |
| 110 | 61.6 | 59.0 | 61.1 | 62.8 | 59.5 | 54.6 | 58.5 | 63.0 | 58.3 | 61.6 | 57.2 | 49.1 | 50.0 | 54.9 | 53.7 | 49.8 | | | |
| 115 | 64.5 | 62.5 | 64.9 | 66.2 | 62.6 | 58.3 | 62.1 | 65.8 | 61.6 | 64.7 | 60.5 | 52.6 | 53.3 | 57.7 | 56.8 | 52.9 | | | |
| 120 | 67.5 | 66.8 | 68.0 | 68.3 | 65.7 | 62.8 | 65.0 | 66.3 | 66.2 | 68.2 | 64.2 | 57.6 | 57.5 | 61.4 | 60.3 | 57.6 | | | |
| 125 | 68.1 | 68.3 | 68.3 | 68.1 | 67.0 | 64.9 | 66.0 | 65.5 | 67.9 | 68.5 | 65.5 | 60.1 | 59.5 | 62.1 | 61.1 | 59.6 | | | |
| 130 | 67.6 | 68.3 | 68.1 | 67.3 | 67.2 | 66.0 | 66.0 | 64.6 | 68.3 | 67.5 | 66.1 | 62.2 | 61.1 | 61.3 | 61.3 | 60.7 | | | |
| 135 | 67.2 | 67.9 | 68.1 | 66.9 | 66.6 | 65.9 | 65.8 | 64.1 | 68.1 | 67.0 | 66.0 | 62.9 | 61.6 | 60.7 | 61.0 | 60.8 | | | |
| 140 | 67.2 | 67.7 | 67.9 | 67.0 | 66.2 | 65.7 | 64.9 | 63.6 | 67.7 | 66.7 | 65.2 | 63.1 | 61.6 | 60.2 | 60.1 | 60.3 | | | |
| 145 | 67.1 | 67.7 | 67.7 | 67.0 | 66.2 | 65.7 | 64.3 | 63.1 | 67.4 | 66.5 | 64.8 | 62.8 | 61.3 | 60.0 | 59.7 | 59.9 | | | |
| 150 | 66.7 | 67.2 | 67.5 | 67.0 | 65.8 | 64.8 | 63.4 | 62.5 | 66.4 | 65.9 | 64.4 | 62.1 | 60.8 | 59.6 | 59.4 | 59.2 | | | |
| 155 | 66.3 | 67.0 | 67.4 | 66.9 | 65.5 | 64.4 | 63.0 | 62.2 | 65.8 | 65.6 | 64.3 | 61.9 | 60.6 | 59.4 | 59.4 | 59.1 | | | |
| 160 | 66.2 | 67.0 | 67.5 | 67.0 | 65.3 | 64.1 | 62.8 | 62.0 | 65.8 | 65.7 | 64.8 | 62.2 | 61.0 | 59.7 | 59.9 | 59.5 | | | |
| 165 | 66.4 | 67.3 | 67.9 | 67.2 | 65.3 | 64.1 | 62.8 | 62.2 | 66.2 | 66.4 | 65.5 | 63.0 | 61.7 | 60.7 | 60.8 | 60.3 | | | |
| 170 | 67.2 | 68.5 | 68.9 | 67.1 | 65.3 | 64.0 | 63.5 | 63.1 | 67.5 | 67.8 | 67.5 | 65.0 | 63.4 | 62.5 | 62.9 | 62.4 | | | |
| 175 | 68.0 | 69.0 | 69.1 | 67.0 | 65.3 | 64.1 | 64.0 | 63.6 | 68.1 | 68.7 | 68.4 | 65.9 | 64.4 | 63.5 | 63.7 | 63.3 | | | |
| 180 | 68.1 | 69.0 | 68.9 | 66.6 | 64.9 | 64.0 | 64.0 | 63.7 | 68.1 | 69.0 | 68.9 | 66.6 | 64.9 | 64.0 | 64.0 | 63.7 | | | |

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:DAMIN

Test Date:21 June 2025

γ Range: 0 - 180DEG

γ Interval: 2.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.471

Humidity:65.0%

Test Distance:6.895m [K=1.0442]

Remarks: