


EMERGENCY LIGHT COMBO SIGN

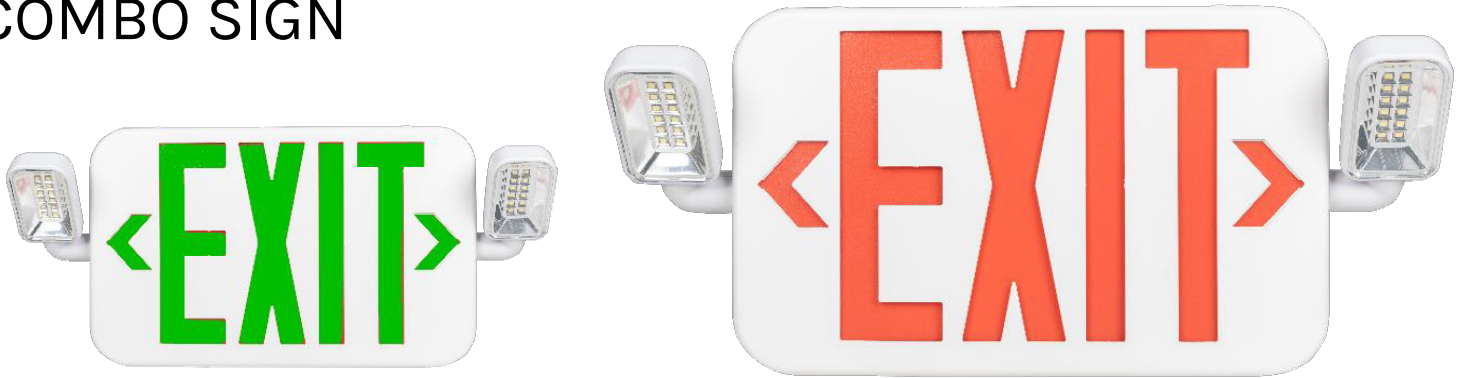

ORDERING INFORMATION

Product Code	Operating Voltage	Discharge Time	Color Of The Sign
KL-7085R	120/277V	90 Minutes	Red
KL-7085G*	120/277V	90 Minutes	Green

*Not In Stock

FEATURES

- LED Technology
- High Visibility
- Multiple Mounting Options
- Battery Backup for power cut situations
- Photoluminescent Signs that glow in Dark
- Follow Compliance and Regulations- UL Listed

SPECIFICATIONS

Operating Temperature	-10°C - +45°C
Product Wattage	2.4W
Input Voltage Range	120-277 VAC
Input Frequency	60Hz
Power Factor	1
Battery	3.6V NiCad - Maintenance Free
Charging Time	24 Hours
Discharge Time	90 Minutes
Mounting	Wall & Ceiling
Finish	White
Frame Material	ABS
Ingress Protection	IP20
Impact Protection	03

Our Combo Emergency Exit Lights are the perfect solution for compact spaces that require both emergency and exit lighting but lack the room for separate installations. This innovative product combines an exit sign with dual LED emergency light heads, offering a comprehensive safety solution for your facility. Ideal for maximizing space while ensuring compliance with safety regulations, our Combo Emergency Exit Lights are a versatile and efficient choice.



Warranty



Rated Life



(864) 401-8156

sales@krutled.com


111 Preamble Ct, Anderson, SC- 29621, United States.

All rights reserved. Krut LED reserves the right to make changes to specifications and/or discontinue any product at anytime without the notice. Information presented in this document is reliable and accurate, it does not represent any quotation or contact. No liability will be accepted by the contributor by the publisher for any consequences for its use. Reproduction in whole or part is prohibited without prior consent of the copyright owner.

OPTICAL PARAMETERS

Total Lumens (Min)	198LM
Product Efficacy (Min)	85lm/W
Product CCT	6500K
CCT Range	5500-7500K
Product CRI	> 80 Ra
Product Beam Angle	126.3 DEG

DIMENSION

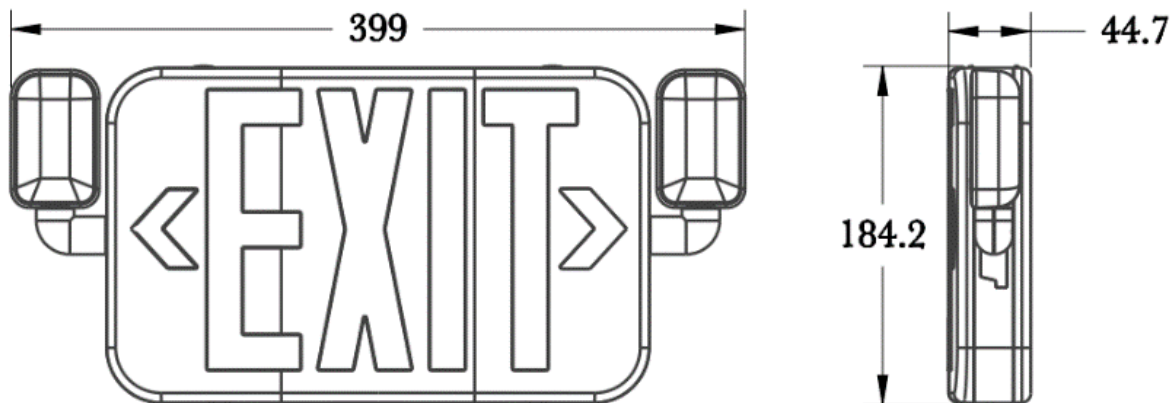

SHIPPING


Product Dimension (in)	Case Lot	Master Carton Dim. (in)	40' HQ Container Qty	Pallet Qty
15.71 x 7.25 x 1.76	10	16.34 x 12.80 x 15.55	1340 Nos	130 Nos

INSTALLATION INSTRUCTIONS


NOTE: First turn off electricity.

Wall mounting


1. Remove mounting plate from fixture.

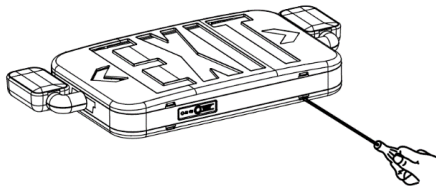

2. Knockout in back of mounting plate and push wires through the hole.

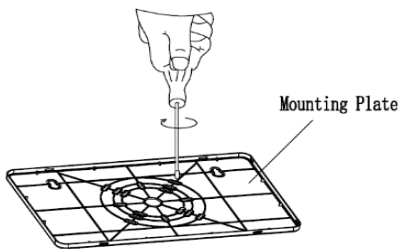

3. Securely attach mounting plate to J- box (not provided).

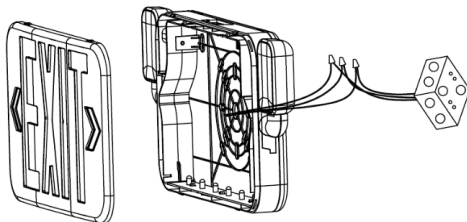


4. ELECTRICAL CONNECTIONS


Make the proper supply wire connections.

If using 120VAC, connect the black and White wires to the building utility.

If using 277VAC, connect the Orange and White wires to the building utility.

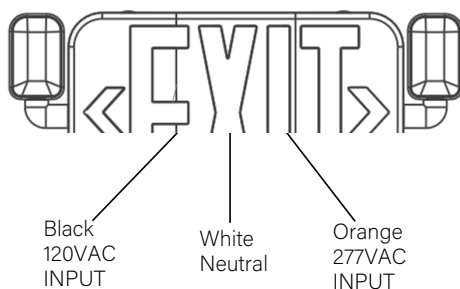

5. Connect the battery to connector on the PCBA.

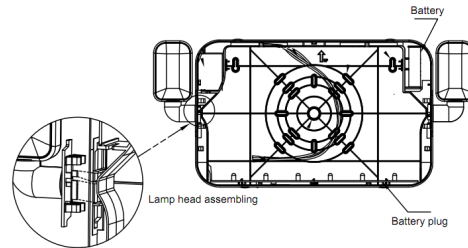


6. Snap fixture onto mounting plate and ensure no wires are pinched. Make sure unit is fully attached.

7. Restore power and press test button. Battery powered LED will come on, AC light will turn off.

Ceiling Mounting

1. Open top cover and knockout on the top of fixture.
2. Secure the mounting plate to tube with nut.
3. Push the wires through hole for ceiling mounting.

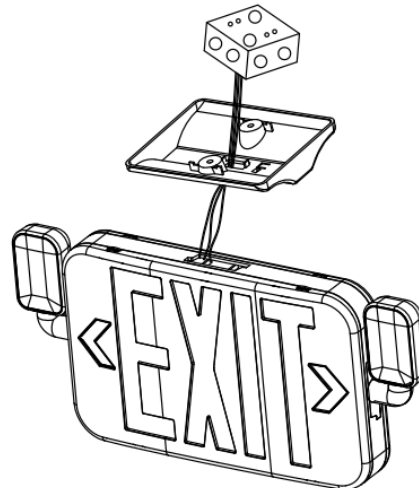

4. Reference step 4-7 in wall mounting above for ceiling mounting.