

ADORE

A19 LAMP

Catalog#	
Project:	
Fixture Type:	Date:
Note:	

Hit the Tab key or mouse over the page to see all interactive elements.

Experience bright, energy-efficient illumination with our high performance LED Lamps. Designed for reliability and clarity, they provide consistent lighting while reducing energy consumption and maintenance. Perfect for any space, our LED Lamps transform any environment with lasting brilliance at the flick of a switch.

FEATURES & BENEFITS

- Delivers high efficacy in 15W light providing upto 1500 lumens.
- Dimming capabilities for optimal customization.
- Suitable for dry and damp location use.
- Operating Temperature: -20°C to +35°C
- Rated for 15,000 hours



Model Number	Wattage	Lumens
HL-A19-9W3K	9W	800lm
HL-A19-9W4K	9W	800lm
HL-A19-9W5K	9W	800lm
HL-A19-11W4K	11W	1100lm
HL-A19-11W5K	11W	1100lm
HL-A19-15W3K	15W	1500lm
HL-A19-15W4K	15W	1500lm
HL-A19-15W5K	15W	1500lm

All models feature selectable CCT options: 3000K/4000K/5000K

PRODUCT SUMMARY

Efficacy
≥89 LM/W

Dimming
0-10V standard

CCT Options
3000K / 4000K / 5000K

Operating Temp.
-20°C to +35°C

CRI
≥80

Warranty
1 Year

Beam Angle
180°

Finish
White

Input Voltage
120Vac

Mounting
E26

Power Factor (PF)
0.5

Housing Material
Plastic+ Aluminum

THD
≤60%

Lens Type
No Lens

Surge Protection
0.5 kV

APPLICATIONS

- Educational Institutions, Healthcare Facilities, Residential areas, Industrial spaces, Office space, and Retail stores.

PERFORMANCE




Model Number	Wattages	CCT	System Lumens	Efficacy	Mains Current	CRI	Input Voltage (120V)
HL-A19-9W3K	9W	3000K	800lm	89 lm/W	0.150 A	≥80	120Vac
HL-A19-9W4K	9W	4000K	800lm	89 lm/W	0.150 A	≥80	120Vac
HL-A19-9W5K	9W	5000K	800lm	89 lm/W	0.150 A	≥80	120Vac
HL-A19-11W4K	11W	4000K	1100lm	100 lm/W	0.183 A	≥80	120Vac
HL-A19-11W5K	11W	5000K	1100lm	100 lm/W	0.183 A	≥80	120Vac
HL-A19-15W3K	15W	3000K	1500lm	100 lm/W	0.233 A	≥80	120Vac
HL-A19-15W4K	15W	4000K	1500lm	100 lm/W	0.233 A	≥80	120Vac
HL-A19-15W5K	15W	5000K	1500lm	100 lm/W	0.233 A	≥80	120Vac

PACKAGING DETAILS

Model Number	Product Dimesion (LxWxH)	Case Qty (units)	Case Dimension (in)	Net Weight Product (lbs)	Gross Weight with Packaging (lbs)	Pallet Load *
HL-A19-9W3K	2.3x4.1	60	14.9x12.6x9.25	6.6	0.05	35
HL-A19-9W4K	2.3x4.1	60	14.9x12.6x9.25	6.6	0.05	40
HL-A19-9W5K	2.3x4.1	60	14.9x12.6x9.25	6.6	0.05	45
HL-A19-11W4K	2.3x4.3	60	14.9x12.5x9.60	7.4	0.12	50
HL-A19-11W5K	2.3x4.3	60	14.9x12.5x9.60	7.4	0.12	55
HL-A19-15W3K	2.5x4.8	60	15.9x13.3x15.2	9.6	0.16	60
HL-A19-15W4K	2.5x4.8	60	15.9x13.3x15.2	9.6	0.16	65
HL-A19-15W5K	2.5x4.8	60	15.9x13.3x15.2	9.6	0.16	70

*Boxes/Pallet-1 Box = 60Pcs

DIMENSIONS

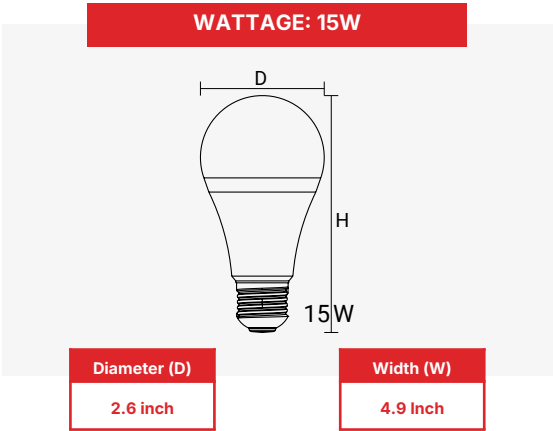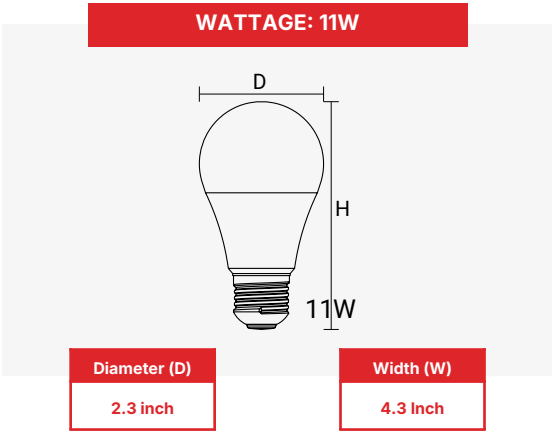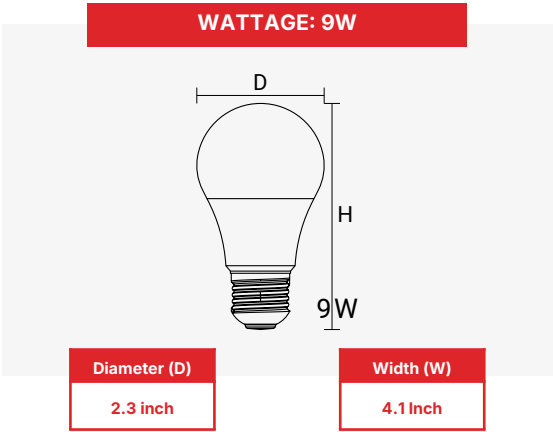

PHOTOMETRIC RESULT

