



Article No	:	
Version	:	04.25
Prepared By	:	
Checked By	:	

K - DL SERIES EXTERNAL DRIVER

VARIANTS

Wattage	Size	Product Code
9W	4"	KLBR09FDLXX4I
12W	6"	KLBR12FDLXX6I
20W	8"	KLBR20FDLXX8I



Krut LED Downlights are correct light for your home or business. Downlights is easy to handle and install. Its Green and eco friendly without mercury.

FEATURES

- High Lumen efficiency to save energy
- Better Lumens & Longer Lamp Life
- Easy installation to save labor cost

APPLICATIONS

- Commercial Luminaire
- Residential Luminaire
- Hotels
- Office



WARRANTY

TECH SPECS

Wattage	9W	12W	20W
Color Temperature	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
CRI	>80	>80	>80
Input Voltage	120VAC	120VAC	120VAC
Lumen	680 lm	1050 lm	1350 lm
Lumen Efficiency	80 - 90 lm/W	80 - 90 lm/W	80 - 90 lm/W
Life Span	50000 Hours	50000 Hours	50000 Hours
Operating Temperature	-25°C to +45°C	-25°C to +45°C	-25°C to +45°C
Storage Temperature	-30°C to +80°C	-30°C to +80°C	-30°C to +80°C
Operating Humidity	20%-90% RH	20%-90% RH	20%-90% RH
Waterproof Rating	Suitable For Dry Locations	Suitable For Dry Locations	Suitable For Dry Locations

(864) 401-8156

sales@krutled.com

111 Preamble Ct, Anderson, SC- 29621, United States.


All rights reserved. Krut LED reserves the right to make changes to specifications and/or discontinue any product at anytime without the notice. Information presented in this document is reliable and accurate, it does not represent any quotation or contact. No liability will be accepted by the contributor by the publisher for any consequences for its use. Reproduction in whole or part is prohibited without prior consent of the copyright owner.

PACKAGING


Wattage	Dimension	Carton Size(in)	Quantity/Carton
9W	4"	15.2 x 15.2 x 13.6	25 PCS
12W	6"	15.4 x 15.4 x 14.0	20 PCS
20W	8"	22.5 x 18.9 x 13.2	20 PCS

INSTALLATION INSTRUCTIONS


J/BOX

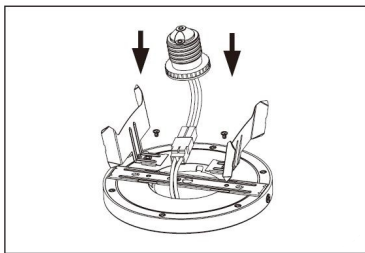

a. Eliminate Trim and Current Lamp from Recessed Fixture

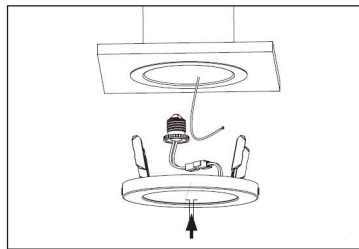


b. Install E26 Socket Adapter into Housing Socket

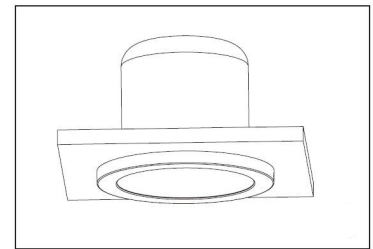


c. Activate the Friction Blade to Safely Insert the Lamp into the Housing and Re-establish Power


SURFACE

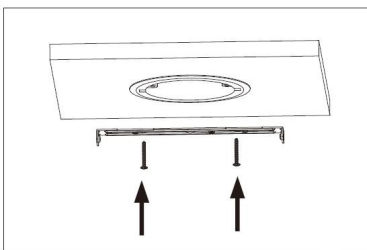

a. Repairing Bracket on Terminal Box

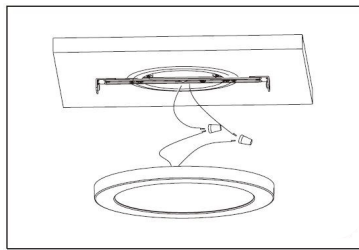

b. Wiring Connections

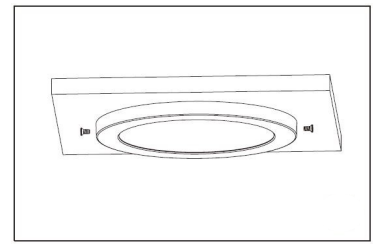

c. Securing the Lamp Body onto the Bracket Firmly