

HEXA

MINI WALL PACK

Catalog#	
Project:	
Fixture Type:	Date:
Note:	

Hit the Tab key or mouse over the page to see all interactive elements.

The Hexa Mini Wall Packs are crafted with exquisite aesthetics and utilize cutting-edge technology. Our outdoor lighting solutions are designed to elevate any outdoor spaces with a seamless blend of functionality and beauty. They provide focused illumination while minimizing light spillage, ensuring precise and controlled lighting to enhance visibility and aesthetics. With their sleek and compact design, these fixtures exude sophistication and style, perfect for any outdoor setting.

FEATURES & BENEFITS

- Delivers high efficacy in 24W light providing upto 3000 lumens.
- Selectable CCT, Wattage, and dimming capabilities for optimal customization.
- ETL listed, DLC Premium, suitable for dry and wet location use.
- Operating Temperature: -20°C to +55°C
- Rated for 50,000 hours, offering a 5-year warranty.



Model Number	Wattage	Lumens	Efficacy
HL-WP-MW-MCCT-24W	12W/18W/24W	3,000lm	125 lm/W
HL-WP-MW-MCCT-24W-PS	12W/18W/24W	3,000lm	125 lm/W

All models feature selectable CCT options: 3000K/4000K/5000K

PRODUCT SUMMARY

Efficacy

≥125 lm/W

Dimming

0-10V standard

CCT Options

3000K / 4000K / 5000K

Operating Temp.

-20°C to +55°C

CRI

≥70

Warranty

5 Years

Beam Angle

90°

Finish

Bronze

Input Voltage

120-277Vac

Mounting

Wall mounted

Power Factor (PF)

0.9

Housing Material

Aluminum Powder Coated

THD

≤20%

Lens Type

No Lens

APPLICATIONS

- Exterior building lighting, Yard and dock lighting, Parking lot lighting, Industrial lighting and Security lighting.

Default Parameters	
Wattage	CCT
24W	5000K
24W	5000K

DLC PRODUCT INFORMATION			
Order ID	DLC Model Number	DLC Source Identifier	Classification
HL-WP-MW-MCCT-24W	HEXA MINI WALL PACK 24W LED SWSC SENSOR	S-02KWW9	Premium
HL-WP-MW-MCCT-24W-PS	HEXA MINI WALL PACK 24W LED SWSC	S-471VST	Premium

PERFORMANCE

Model Number	Wattages	Input Current	3000K (≥70 CRI)		4000K (≥70 CRI)		5000K (≥70 CRI)	
			Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
HL-WP-MW-MCCT-24W	12W/18W/24W	0.111A/0.167A/0.222A	1500lm	≥125 lm/W	2250lm	≥125 lm/W	3000lm	≥125 lm/W
HL-WP-MW-MCCT-24W-PS	12W/18W/24W	0.111A/0.167A/0.222A	1500lm	≥125 lm/W	2250lm	≥125 lm/W	3000lm	≥125 lm/W

Lumen and efficacy data are based on the CCT of each higher wattage SKU.

PACKAGING DETAILS

Model No.	Product Dimension (LxWxH) (In)	Case Qty (units)	Case Dimension (LxWxH) (In)	Net Weight Product (lbs)	Gross Weight with Packaging (lbs)	Pallet Load
HL-WP-MW-MCCT-24W	9.0x6.5x3.1	10	18.4x14.1x9.8	2.4	24.3	30
HL-WP-MW-MCCT-24W-PS	9.0x6.5x3.1	10	18.4x14.1x9.8	2.4	24.3	30


*Boxes/Pallet-1 Box = 10Pcs

DIMENSIONS

WATTAGE: 24W

Length (L)
9.0 inch
Width (W)
6.5 Inch
Height (H)
3.1 Inch

PHOTOMETRIC RESULT

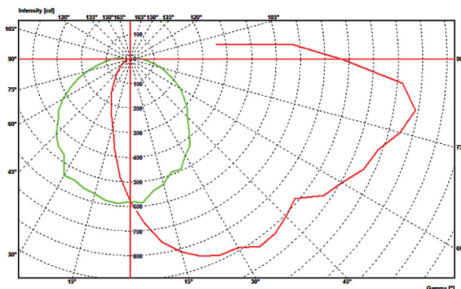

V2.1
Last Updated: March 16, 2026 01:00 PM