

Catalog#	
Project:	
Fixture Type:	Date:
Note:	

# LINEAR HIGHBAY

Hit the Tab key or mouse over the page to see all interactive elements.

The Havells LED Linear Highbay is an energy-efficient replacement for 400W Metal Halide or T8 fluorescent tubes, offering up to 50,000 hours of maintenance-free use. Its durable, shatter-resistant design prevents hot spots and discoloration over time. Perfect for warehouses, garages, retail stores, and sports facilities. It delivers reliable, uniform lighting with no bulbs to replace. Moreover, you can now add sensors to them without any installation hassle and wiring issues. Just remove the knob on the highbay and mount the sensor in place of that.



## FEATURES & BENEFITS

- Delivers high efficacy in 400W light providing upto 54,000 lumens.
- Dimming capabilities for optimal customization.
- ETL & UL Certified, DLC certified, suitable for dry and damp location use.
- Operating Temperature:-20°C to +45°C
- Rated for 50,000 hours, offering a 5-year warranty.



Model Number	Wattage	Lumens
HL-LHB-MW-MCCT-115W	85W/100W/115W	11,475lm/13,500lm/15,525lm
HL-LHB-MW-MCCT-150W	120W/135W/150W	16,200lm/18,225lm/20,250lm
HL-LHB-MW-MCCT-180W	140W/160W/180W	18,900lm/21,600lm/24,300lm
HL-LHB-MW-MCCT-240W	200W/220W/240W	27,000lm/29,700lm/32,400lm
HL-LHB-300W5K	300W	40,500lm
HL-LHB-400W5K	400W	54,000lm
HL-LHB-300W5K-HV	300W	40,500lm
HL-LHB-400W5K-HV	400W	54,000lm

MCCT models codes feature selectable CCT options: 3000K/4000K/5000K

## PRODUCT SUMMARY

### Efficacy

135 lm/W

### CCT (Selectable)

3000K / 4000K / 5000K

### CRI

≥80

### Beam Angle

120°

### Input Voltage

120-277 Vac | 277-480 Vac

### Power Factor (PF)

0.95

### THD

≤10%

### Dimming

0-10V Standard

### Operating Temp.

-20°C to +45°C

### Warranty

5 Years

### Finish

White

### Mounting

Suspended and Ceiling

### Housing Material

Metal Powder Coated

### Lens Type

Clear Diffuser

## OPTIONAL ACCESSORY

- 20W Remote Emergency Battery Backup, RC-100 Sensor Remote Control and Occupancy Sensor.

## APPLICATIONS

- Warehouse & Storage, Industrial Facilities, Sports Facilities & Gyms, Manufacturing Facilities, and Retail Centers.

Default Parameters	
Wattage	CCT
115W	5000K
150W	5000K
180W	5000K
240W	5000K
300W	5000K
400W	5000K
300W	5000K
400W	5000K

DLC PRODUCT INFORMATION			
Order ID	DLC Model Number	DLC Source Identifier	Classification
HL-LHB-MW-MCCT-115W	LINEAR HB SUS X 115W SWSC	S-7N6B6Z	Premium
HL-LHB-MW-MCCT-150W	LINEAR HB SUS X 150W SWSC	S-SXZXW9	Listed
HL-LHB-MW-MCCT-180W	LINEAR HB SUS X 180W SWSC	S-JMYKGR	Premium
HL-LHB-MW-MCCT-240W	LINEAR HB SUS X 240W SWSC	S-MFHLHT	Listed
HL-LHB-300W5K	LINEAR HB SUS X 300W 850	S-HJN206	Listed
HL-LHB-400W5K	LINEAR HB SUS X 400W 850	S-65S9BT	Listed
HL-LHB-300W5K-HV	LINEAR HB SUS X 300W 850 HV	S-5WFPY3	Listed
HL-LHB-400W5K-HV	LINEAR HB SUS X 400W 850 HV	S-Y7R8YR	Listed

## PERFORMANCE

Model Number	Selectable Wattages	Input Current	3000K (≥80 CRI)		4000K (≥80 CRI)		5000K (≥80 CRI)	
			Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
<b>HL-LHB-MW-MCCT-115W</b>	85W/100W/115W	0.746A/0.877A/1.008A	11,475lm	135 lm/W	13,500lm	135 lm/W	15,525lm	135 lm/W
<b>HL-LHB-MW-MCCT-150W</b>	120W/135W/150W	1.053A/1.184A/1.316A	16,200lm	135 lm/W	18,225lm	135 lm/W	20,250lm	135 lm/W
<b>HL-LHB-MW-MCCT-180W</b>	140W/160W/180W	1.228A/1.404A/1.579A	18,900lm	135 lm/W	21,600lm	135 lm/W	24,300lm	135 lm/W
<b>HL-LHB-MW-MCCT-240W</b>	200W/220W/240W	1.754A/1.929A/2.105A	27,000lm	135 lm/W	29,700lm	135 lm/W	32,400lm	135 lm/W

\*Lumen and efficacy data are based on the CCT of each higher wattage SKU\*.

Model Number	Wattages	System Lumens	CCT	Input Current	Efficacy	Input Voltage
<b>HL-LHB-300W5K</b>	300W	40,500lm	5000K	2.631A	135 lm/W	120-277Vac
<b>HL-LHB-400W5K</b>	400W	54,000lm	5000K	3.508A	135 lm/W	120-277Vac
<b>HL-LHB-300W5K-HV</b>	300W	40,500lm	5000K	1.140A	135 lm/W	277-480Vac
<b>HL-LHB-400W5K-HV</b>	400W	54,000lm	5000K	1.520A	135 lm/W	277-480Vac

## PACKAGING DETAILS

Model No.	Product Dimension (LxWxH) (in)	Case Qty (units)	Case Dimension (LxWxH) (in)	Net Weight Product (lbs)	Gross Weight with Packaging (lbs)	Pallet Load
HL-LHB-MW-MCCT-115W	19.0x13x1.8	2	21.1x6.0x15.2	7.50	17.0	50
HL-LHB-MW-MCCT-150W	24.8x13x1.8	2	32.7x6.0x15.2	8.10	19.0	34
HL-LHB-MW-MCCT-180W	30.8x13x1.8	2	32.7x6.0x15.2	9.50	21.8	30
HL-LHB-MW-MCCT-240W	30.8x13x1.8	2	32.7x6.0x15.2	9.50	21.8	30
HL-LHB-300W5K	36.2x13x1.8	2	38.3x6.0x15.2	12.6	28.4	30
HL-LHB-400W5K	45.5x13x1.8	2	47.5x6.0x15.2	14.8	33.5	24
HL-LHB-300W5K-HV	36.2x13x1.8	2	38.3x6.0x15.2	9.90	23.0	30
HL-LHB-400W5K-HV	45.5x13x1.8	2	47.5x6.0x15.2	13.0	30.0	24

## ACCESSORIES (SOLD SEPARATELY)



**20W Remote  
Emergency  
Battery Backup**  
(HL-EM-03-01-1)




**Occupancy  
Sensor**  
(HL-ANT-6-4R)



**RC-100  
Sensor Remote Control**  
(Remote - HL-ANT-6-4R)


# DIMENSIONS

**SELECTABLE WATTAGE & CCT: 115W**




Length (L)	Width (W)	Height (H)
19.0 inch	13 Inch	1.8 Inch

**SELECTABLE WATTAGE & CCT: 150W**




Length (L)	Width (W)	Height (H)
24.8 inch	13 Inch	1.8 Inch

**SELECTABLE WATTAGE & CCT: 180W**




Length (L)	Width (W)	Height (H)
30.8 inch	13 Inch	1.8 Inch

**SELECTABLE WATTAGE & CCT: 240W**




Length (L)	Width (W)	Height (H)
30.8 inch	13 Inch	1.8 Inch

**WATTAGE: 300W-5K/300W-HV**




Length (L)	Width (W)	Height (H)
36.2 inch	13 Inch	1.8 Inch

**WATTAGE: 400W-5K/400W-HV**



Length (L)	Width (W)	Height (H)
45.5 inch	13 Inch	1.8 Inch

# Photometric Result

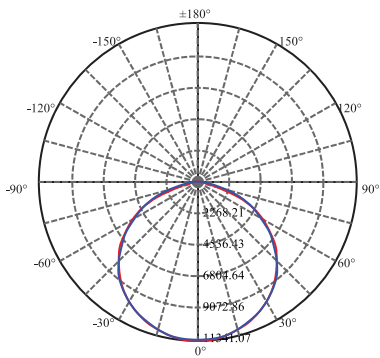

V3

Last Updated: June 11, 2026 01:30 AM