

Catalog#	
Project:	
Fixture Type:	Date:
Note:	

Hit the Tab key or mouse over the page to see all interactive elements.

The LED Parking Garage Light delivers dependable provides exceptional durability with IK10 impact-rated housing, energy-efficient brightness featuring selectable wattage and CCT. A built-in Dusk-to-dawn photocell automatically, ON/OFF also has a manual switch. Give flexibility to adapt the fixture to project requirements. A built-in motion sensor and an optional remote allow quick programming of the motion sensor for faster commissioning.

FEATURES & BENEFITS

- 40W high-efficiency LED delivering up to 6,000 lumens
- Selectable CCT with a 160° wide beam angle
- Built-in Photocell & Motion Sensor
- Junction Box Mount Compatible
- IK10 Impact Rated
- 50,000-hour rated life



Model Number	Wattage	Lumens	Efficacy
HL-CP-MW-MCCT-40W	20W/30W/40W	6,000lm	140 lm/W
HL-CP-MW-MCCT-75W	40W/60W/75W	10,875lm	140 lm/W

All models feature selectable CCT options: 3000K/4000K/5000K

PRODUCT SUMMARY

Efficacy 140 lm/W	Beam Angle 160°	THD ≤20%	Operating Temp. -30°C - +50°C	Mounting Ceiling Mount
CCT (Selectable) 3000/4000/5000K	Input Voltage 120-277 Vac	Surge Protection L/N-PE:6kV,L-N:4kV	Warranty 5 Years	Housing Material Aluminum
CRI >80	Power Factor (PF) ≥0.9	Dimming 0-10V standard	Finish White	Lens Type Polycarbonate

APPLICATIONS

- Parking decks, ramps, stairwells, canopies, and other covered commercial spaces.

OPTIONAL ACCESSORIES

- Remote Control (to configure or disable the motion sensor)

Default Parameters	
Wattage	CCT
40W	5000K
75W	5000K

DLC PRODUCT INFORMATION			
Order ID	DLC Model Number	DLC Source Identifier	Classification
HL-CP-MW-MCCT-40W	HL-CP-MW-MCCT-40W-AA-ZZZZ	S-6565H5	Premium
HL-CP-MW-MCCT-75W	-	In Progress	Premium

PERFORMANCE

Model Number	Selectable Wattages	Input Current	3000K (>80 CRI)		4000K (>80 CRI)		5000K (>80 CRI)	
			Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
HL-CP-MW-MCCT-40W	20W/30W/40W	0.33A	3,000lm	131 lm/W	4,500lm	150 lm/W	6,000lm	140 lm/W
HL-CP-MW-MCCT-75W	40W/60W/75W	0.65A	5,800lm	131 lm/W	8,700lm	150 lm/W	10,875lm	140 lm/W

*Lumen and efficacy data are based on the CCT of each higher wattage SKU

PACKAGING DETAILS

Model No.	Product Dimension (LxWxH) (in)	Case Qty (units)	Case Dimension (LxWxH) (in)	Net Weight Product (lbs)	Gross Weight with Packaging (lbs)	Pallet Load
HL-CP-MW-MCCT-40W	8.03x8.03x3.66	2	12.28x10.75x11.02	3.90	11.09	192
HL-CP-MW-MCCT-75W	10.0x10.0x4.17	2	13.07x12.72x21.99	6.27	17.29	126


ADDITIONAL ACCESSORIES (SOLD SEPARATELY)



Remote Control
(HL-STM-SENSOR-REMOTE)

DIMENSIONS

SELECTABLE WATTAGE & CCT: 40W

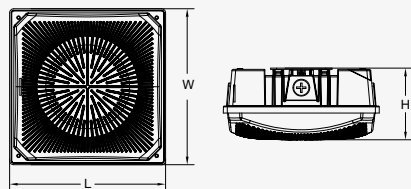

Length (L)

8.03 Inch


Width (W)

8.03 Inch

Height (H)

3.66 Inch

SELECTABLE WATTAGE & CCT: 75W

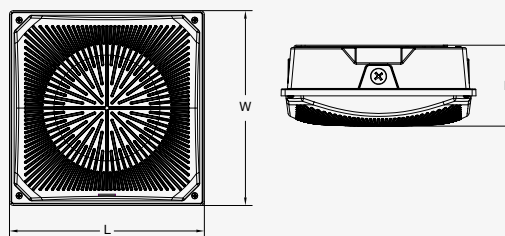

Length (L)

10.0 Inch

Width (W)


10.0 inch

Height (H)

4.17 Inch

PHOTOMETRIC RESULT

(40W-3000K)

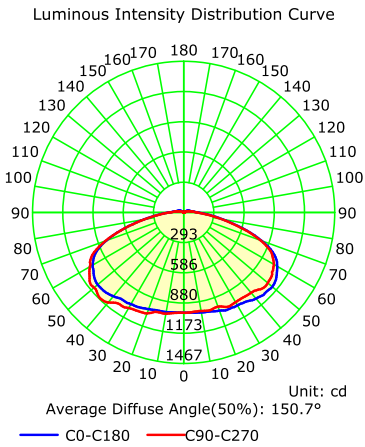

(75W-3000K)

