

HERCULES GEN 2

PANEL LIGHT (2X4)


Catalog#	
Project:	
Fixture Type:	Date:
Note:	

Hit the Tab key or mouse over the page to see all interactive elements.

The Havells Hercules Gen 2 2x4 Panel Light is built for everyday lighting for spaces where reliable lighting matters most. Its durable housing makes it tough in environments while still spreading light evenly and comfortably. On-site selectable from four wattages (25W/34W/42W/50W) and five CCTs (3000K to 6500K), with dimming capability and 0-10V controls. Suitable for dry and damp locations with 50,000 hours life span.

FEATURES & BENEFITS

- Delivers high efficacy with 2x4 providing upto 6,000 lumens
- Adjustable 5CCT and 4 Wattage options for tailored lighting
- DLC 6.0 Listed and suitable for dry and damp location use
- Rated for 50,000 hours, offering a 5-year warranty

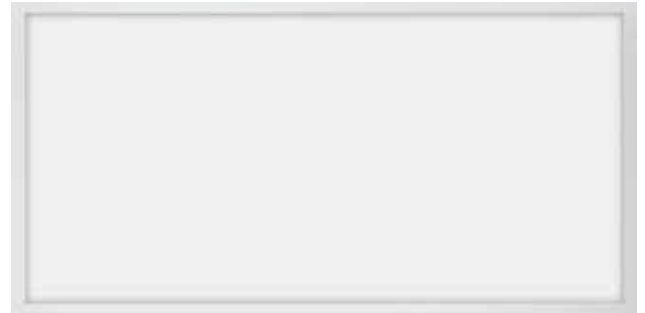

MASTER PACK
WITH 4 INDIVIDUAL PACKED
AND 4 BULK PACK

Model Number	Wattage	Lumens	Efficacy
HL-2x4-4MW-5MCCT-BACK-LIT PANEL	25W/34W/42W/50W	6,000lm	120 lm/W

All models feature selectable CCT options: 3000K/3500K/4000K/5000K/6500K

PRODUCT SUMMARY

Efficacy
120 lm/W

CCT (Selectable)
3000K/3500K/4000K/5000K/6500K

CRI
≥80

Beam Angle
110°

Input Voltage
120-277 Vac

Power Factor (PF)
≥0.9

THD
≤20%

Dimming
0-10V standard

Operating Temp.
-20°C to +50°C

Warranty
5 Years

Finish
White

Mounting
Recessed Ceiling Mounting

Housing Material
Iron+PS

Lens Type
PS

APPLICATIONS

- Commercial Spaces, Airport lounges, Corporate offices, Banks & ATM outlets, Data centers, Modern Work spaces, Schools, Churches and Hospital premises.

Default Parameters	
Wattage	CCT
50W	6500K

DLC PRODUCT INFORMATION			
Order ID	DLC Model Number	DLC Source Identifier	Classification
HL-2x4-4MW-5MCCT-BACK-LIT PANEL	In Progress	In Progress	DLC 6.0 Standard

PERFORMANCE

			3000K (>80 CRI)		3500K (>80 CRI)		4000K (>80 CRI)		5000K (>80 CRI)		6500K (>80 CRI)	
Model Number	Wattages	Input Current	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
HL-2x4-4MW-5MCCT-BACK-LIT PANEL	25W	0.23A@120V/0.10A@277V	3,000lm	120 lm/W	3,000lm	120 lm/W	3,000lm	120 lm/W	3,000lm	120 lm/W	3,000lm	120 lm/W
	34W	0.31A@120V/0.14A@277V	4,080lm	120 lm/W	4,080lm	120 lm/W	4,080lm	120 lm/W	4,080lm	120 lm/W	4,080lm	120 lm/W
	42W	0.39A@120V/0.17A@277V	5,040lm	120 lm/W	5,040lm	120 lm/W	5,040lm	120 lm/W	5,040lm	120 lm/W	5,040lm	120 lm/W
	50W	0.46A@120V/0.20A@277V	6,000lm	120 lm/W	6,000lm	120 lm/W	6,000lm	120 lm/W	6,000lm	120 lm/W	6,000lm	120 lm/W

PACKAGING DETAILS

MASTER PACK WITH 4 INDIVIDUAL PACKED DIMENSIONS


Model No.	Product Dimension (LxWxH) (in)	Case Qty (units)	Case Dimension (LxWxH) (in)	Net Weight Product (lbs)	Gross Weight with Packaging (lbs)	Pallet Load
HL-2x4-4MW-5MCCT-BACK-LIT PANEL	47.76 x 23.74 x 1.38	4	48.90 x 25.39 x 7.60	28.66	40.45	-

MASTER PACK WITH 4 BULK PACK DIMENSIONS

Model No.	Product Dimension (LxWxH) (in)	Case Qty (units)	Case Dimension (LxWxH) (in)	Net Weight Product (lbs)	Gross Weight with Packaging (lbs)	Pallet Load
HL-2x4-4MW-5MCCT-BACK-LIT PANEL	47.76 x 23.74 x 1.38	4	48.66 x 25.04 x 6.22	28.66	33.07	-

DIMENSIONS

SELECTABLE 4WATTAGE & 5CCT: 2X4

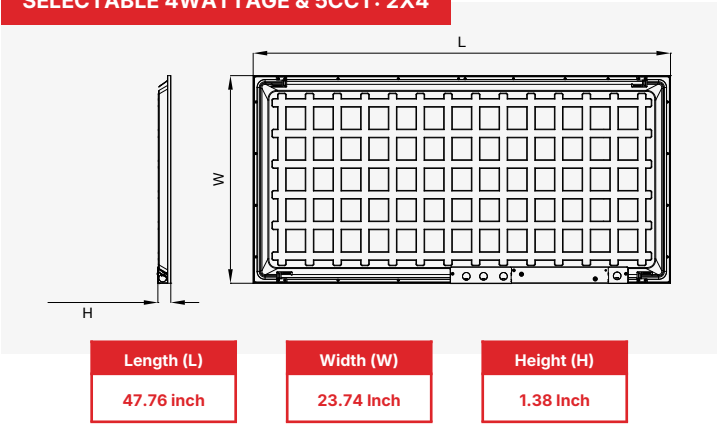

V0.4

Last Updated: October 12, 2026 03:00 PM