

LED WRAP FIXTURE


Catalog#	
Project:	
Fixture Type:	Date:
Note:	

Hit the Tab key or mouse over the page to see all interactive elements.

The Havells 4ft LED wrap fixture is built for everyday lighting for spaces where reliable lighting matters most. Its durable housing makes it tough in environments while still spreading light evenly and comfortably. On-site selectable from four wattages (17W/24W/31W/38W) and five CCTs (3000K to 6500K), with dimming capability and 0-10V controls. Suitable for dry and damp locations with 100,000 hours life span.

FEATURES & BENEFITS

- High efficacy with the 4' light delivering 5,700 lumens
- Adjustable 5CCT and 4Wattage options for tailored lighting
- Available in three variant sizes: 2ft, 4ft and 8ft
- Rated for 100,000 hours, offering a 5-year warranty

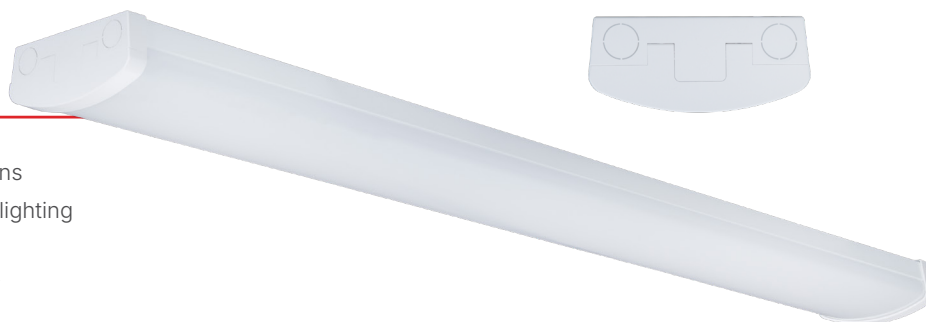

MASTER PACK
WITH 4 INDIVIDUAL PACKED

Model Number	Wattage	Lumens	Efficacy
HL-WA-4MW-5MCCT-25W-2 Feet**	12W/16W/20W/25W	3,675lm	147 lm/W
HL-WA-4MW-5MCCT-38W-4 Feet	17W/24W/31W/38W	5,700lm	150 lm/W
HL-WA-4MW-5MCCT-68W-8 Feet**	42W/47W/53W/68W	10,064lm	148 lm/W

All models feature selectable CCT options: 3000K/3500K/4000K/5000K/6500K

** Marked is Make to Order

PRODUCT SUMMARY

Efficacy

Up to 145 lm/W

CCT (Selectable)

3000K/3500K/4000K/5000K/6500K

CRI

80

Beam Angle

110°

Input Voltage

120-277 Vac

Power Factor (PF)

≥0.9

THD

≤20%

Dimming

0-10V standard

Operating Temp.

-20°C to +50°C

Warranty

5 Years

Finish

White

Mounting

Surface

Housing Material

Sheet metal+PC

Lens Type

PC

ADDITIONAL ACCESSORY (SOLD SEPARATELY)

- Cable suspension kit (HL-WA-Cable suspension kit), End-to-end connector kit (HL-WA-End-to-end connector kit), Connection plate (HL-WA-Connection plate) and 1 feet linking cord (HL-WA-1 feet linking cord).

APPLICATIONS

- Restaurants & Hotels, Hallways & Corridors, Offices & Commercial Spaces, Hospitals & Healthcare Facilities, Schools & Classrooms, Meeting Rooms, Lobbies & Common Areas, Transit Stations, Stairwells & Utility Areas.

Default Parameters	
Wattage	CCT
25W	6500K
38W	6500K
68W	6500K

DLC PRODUCT INFORMATION			
Order ID	DLC Model Number	DLC Source Identifier	Classification
HL-WA-4MW-5MCCT-25W-2 Feet**	On Progress	On Progress	DLC 6.0 Premium
HL-WA-4MW-5MCCT-38W-4 Feet	On Progress	On Progress	DLC 6.0 Premium
HL-WA-4MW-5MCCT-68W-8 Feet**	On Progress	On Progress	DLC 6.0 Premium

PERFORMANCE

			3000K (>80 CRI)		3500K (>80 CRI)		4000K (>80 CRI)		5000K (>80 CRI)		6500K (>80 CRI)		
Model Number		Wattages	Input Current		Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	
HL-WA-4MW-5MCCT-25W-2 Feet**		12W	0.11A@120V/0.05A@277V	1,776lm	148 lm/W	1,776lm	148 lm/W	1,800lm	150 lm/W	1,788lm	149 lm/W	1,776lm	148 lm/W
		16W	0.15A@120V/0.06A@277V	2,352lm	147 lm/W	2,352lm	147 lm/W	2,384lm	149 lm/W	2,368lm	148 lm/W	2,352lm	147 lm/W
		20W	0.18A@120V/0.08A@277V	2,920lm	146 lm/W	2,920lm	146 lm/W	2,960lm	148 lm/W	2,940lm	147 lm/W	2,920lm	146 lm/W
		25W	0.23A@120V/0.10A@277V	3,625lm	145 lm/W	3,625lm	145 lm/W	3,675lm	147 lm/W	3,650lm	146 lm/W	3,625lm	145 lm/W
HL-WA-4MW-5MCCT-38W-4 Feet		17W	0.16A@120V/0.07A@277V	2,516lm	148 lm/W	2,516lm	148 lm/W	2,533lm	149 lm/W	2,601lm	153 lm/W	2,516lm	148 lm/W
		24W	0.22A@120V/0.10A@277V	3,528lm	147 lm/W	3,528lm	147 lm/W	3,552lm	148 lm/W	3,648lm	152 lm/W	3,528lm	147 lm/W
		31W	0.28A@120V/0.12A@277V	4,526lm	146 lm/W	4,526lm	146 lm/W	4,557lm	147 lm/W	4,681lm	151 lm/W	4,526lm	146 lm/W
		38W	0.35A@120V/0.15A@277V	5,510lm	145 lm/W	5,510lm	145 lm/W	5,548lm	146 lm/W	5,700lm	150 lm/W	5,510lm	145 lm/W
HL-WA-4MW-5MCCT-68W-8 Feet**		42W	0.39A@120V/0.17A@277V	6,216lm	148 lm/W	6,216lm	148 lm/W	6,300lm	150 lm/W	6,342lm	151 lm/W	6,216lm	148 lm/W
		47W	0.43A@120V/0.19A@277V	6,909lm	147 lm/W	6,909lm	147 lm/W	7,003lm	149 lm/W	7,050lm	150 lm/W	6,909lm	147 lm/W
		53W	0.49A@120V/0.21A@277V	7,738lm	146 lm/W	7,738lm	146 lm/W	7,844lm	148 lm/W	7,897lm	149 lm/W	7,738lm	146 lm/W
		68W	0.62A@120V/0.27A@277V	9,860lm	145 lm/W	9,860lm	145 lm/W	9,996lm	147 lm/W	10,064lm	148 lm/W	9,860lm	145 lm/W

Remarks: **Marked is Make to Order

PACKAGING DETAILS

Model Number	Product Dimension (LxWxH) (in)	Case Qty (units)	Case Dimension (LxWxH) (in)	Net Weight Product (lbs)	Gross Weight with Packaging (lbs)
HL-WA-4MW-5MCCT-25W-2 Feet**	24.4 × 5.5 × 2.4	-	-	-	-
HL-WA-4MW-5MCCT-38W-4 Feet	47.6 × 5.5 × 2.4	4	49.06 x 5.5 x 2.4	13.24 lbs	18.74 lbs
HL-WA-4MW-5MCCT-68W-8 Feet**	93.8 × 5.5 × 2.4	-	-	-	-

DIMENSIONS

