

SWITCHABLE EMERGENCY EXIT SIGN

Catalog#	
Project:	
Fixture Type:	Date:
Note:	

Hit the Tab key or mouse over the page to see all interactive elements.

The Switchable Emergency Exit Sign is an essential safety fixture that provides reliable illumination during emergencies and power outages. It clearly marks exit routes, enabling safe, quick evacuation while enhancing overall building safety.

FEATURES & BENEFITS

- Innovative, easy installation in minutes
- Interchangeable Red or Green Lettering
- 90 minutes Emergency Operation
- Maintenance-Free NiCad Battery
- Durable 5VA-Rated Flame-Retardant Thermoplastic Housing
- Top, End, or Back Wall/Ceiling Mounting
- Supports Single or Double-Face Mounting




Model Number	Input Current	Wattage	LED Type	Charging Time	Emergency Run Time
HL-EX-E	0.02A	1.1W	6 Red LEDs + 6 Green LEDs	24 hours	90 Minutes

PRODUCT SUMMARY

Input Voltage 120-277 Vac	Battery Type Nickel Cadmium (1.2V)	Finish White
Operating Temp. 0°C to +40°C	Input Current 0.02A	Mounting Wall, Ceiling & Side
Discharge Time 90-Minutes	Dimming No	Housing Material Thermoplastic ABS
Recharge Time 24 hours	Warranty 5 Years	

DIMENSIONS

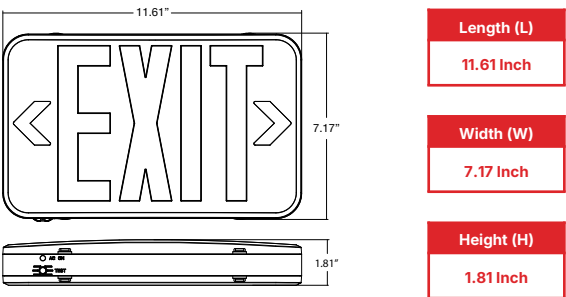

APPLICATIONS

- Commercial Buildings & Offices, Industrial Facilities, Large Public Venues, Hospitality & Healthcare and Retail Centers & Malls.

INCLUDED ACCESSORIES

- Mounting Hardware & Wiring Kit, Diffuser and Battery.

PACKAGING DETAILS

Model No.	Product Dimension (LxWxH) (in)	Case Qty (units)	Case Dimension (LxWxH) (in)	Net Weight Product (lbs)	Gross Weight with Packaging (lbs)	Pallet Load
HL-EX-E	11.61 x 7.17 x 1.81	6	15.16 x 12.4 x 8.46	1.5	2.1	-